



Environmental Product Declaration

MOCTEZUMA®

Environmental Product Declaration for concrete products
produced by Cementos Moctezuma, S.A. de C.V. at their
Tultepec facility in Estado de México, México

ADMINISTRATIVE INFORMATION

International Certified Environmental Product Declaration

Declared Product:	This Environmental Product Declaration (EPD) covers ready mix concrete products produced by Cementos Moctezuma S.A. de C.V. Declared unit: 1 m3 of concrete
Declaration Owner:	Cementos Moctezuma S.A. de C.V.
	134 PH Monte Elbruz, Col. Lomas de Chapultepec
	Ciudad de México, México
	www.cmoctezuma.com.mx
	Jair Juan Manuel Martínez Miguel, martinezjair@cmoctezuma.com.mx
Program Operator:	Labeling Sustainability
	Address, 11670 W Sunset Blvd.
	Los Angeles, CA
	www.labelingsustainability.com
Product Category Rule:	ISO 21930:2017 Sustainability in Building Construction – Environmental Declaration of Building Products: serves as the core PCR Product Category Rule of Environmental Product Declarations PCR for Concrete serves as the sub-category PCR.
	PCR Program Operator: NSF International
	Sub-category PCR review was conducted by: Thomas P. Gloria, Ph. D. of Industrial Ecology Consultants: 35 Bracebridge, Rd., Newton, MA 02459-1728, t.gloria@industrial-ecology.com. Dr. Michael Overcash of Environmental Clarity: 2908 Chipmunk Lane, Raleigh, NC 27607-3117, mrovercash@earthlink.net. Mr. Bill Stough of Sustainable Research Group: PO Box 1684, Grand Rapids, MI 49501-1684, bstough@sustainableresearchgroup.com.
Independent LCA Reviewer and EPD Verifier:	This EPD was independently verified in accordance with ISO 14025 and ISO 21930. The life cycle assessment was independently reviewed in accordance ISO 14044 and the referenced PCR.
	Independent verification of the declaration, according to ISO 14025:2006
	External
	Third Party Verifier
	Geoffrey Guest, Certified 3rd Party Verifier under the International EPD Program (www.environdec.com), CSA Group (www.csaregistries.ca)
Date of Issue:	27 January 2025
Period of Validity:	5 years; valid until 27 January 2030
EPD Number:	4294c30e-c001-4884-b434-97e992aef1fg





TABLE OF CONTENTS

Administrative Information1

Company Description3

Study Goal3

Description Of Product And Scope4

Ready Mix Concrete Design Summary4

Ready Mix Concrete Design Composition 14

System Boundaries 15

Cut-Off Criteria 16

Data Sources And Data Quality Assessment 16

 Raw Material Transport16

 Electricity.....17

 Fuel Required For Machinery17

 Waste Generation.....17

 Recovered Energy17

 Recycled/Reused Material/Components17

 Module A1 Material Losses.....17

 Direct A3 Emissions Accounting.....17

 Waste Transport Requirements17

 Product Transport Requirements.....17

Data Quality Assessment 18

Environmental Indicators And Inventory Metrics 19

Limitations 21

Total Impact Summary 21

Other Environmental Info 38

References 39

 ASTM Standards..... 39

 ISO Standards40



COMPANY DESCRIPTION

Cementos Moctezuma is a prominent Mexican company established in 1943, specializing in the production, distribution, and marketing of cement, concrete, and aggregates under the well-known brands Cementos Moctezuma and Concretos Moctezuma. Listed on the Mexican Stock Exchange since 1988, the company maintains a strong financial position characterized by discipline and zero debt.

With three cement plants boasting an annual capacity of eight million tons and 30 concrete plants producing over 590 types of concrete, Cementos Moctezuma has an extensive distribution network of more than 530 centers, covering 95% of Mexico. The company also offers value-added services, including specialized technical advice, mobile laboratories, construction supervision, and training.

Cementos Moctezuma is committed to sustainable development, aligning its operations with the United Nations' Sustainable Development Goals through a strategy focused on five pillars: Safety and health, Energy and climate change, Corporate social responsibility, Environment and biodiversity, and Circular economy. The company emphasizes technological innovation and operational efficiency to produce high-quality products while minimizing environmental impact, including reducing CO₂ emissions and optimizing water use.

A qualified team of 1,303 passionate collaborators drives Cementos Moctezuma's mission to promote the construction of a better country for families and future generations while being committed to environmental stewardship. The company also champions equity and inclusion in the construction industry through initiatives like Casco Rosa, which recognizes the contributions of women in the sector. Additionally, Cementos Moctezuma actively engages in social responsibility programs to enhance the quality of life in the communities it serves, reinforcing its status as a consolidated company with deep Mexican roots.

STUDY GOAL

The intended application of this life cycle assessment (LCA) is to comply with the procedures for creating a Type III environmental product declaration (EPD) and publish the EPD for public review on the website, <http://labelingsustainability.com/>. This level of study is in accordance with EPD Product Category Rule (PCR) for Ready Mix Concrete published by NSF International (2019) and is a sub-PCR of International Standards Organization (ISO) 21930:2017 Sustainability in buildings and civil works - Core rules for EPDs of construction products and services; International Standards Organization (ISO) 14025:2006 Environmental labels and declarations, Type III environmental declarations-Principles and procedures; ISO 14044:2006 Environmental management, Life cycle assessment- Requirements and guidelines; and ISO 14040:2006 Environmental management, Life cycle assessment-Principles and framework. The performance of this study and its subsequent publishing is in alignment with the business-to-business (B2B) communication requirements for the environmental assessment of building products. The study does not intend to support comparative assertions and is intended to be disclosed to the public.

This project report was commissioned to differentiate Cementos Moctezuma from their competition for the following reasons: generate an advantage for the organization; offer customers information to help them make informed product decisions; improve the environmental performance of Cementos Moctezuma by continuously measuring, controlling and reducing the environmental impacts of their products; help project facilitators working on Leadership in Energy and Environmental Design (LEED)



projects achieve their credit goal; and to strengthen Cementos Moctezuma's license to operate in the community. The intended audience for this LCA report is Cementos Moctezuma's employees, their suppliers, project specifiers of their products, architects, and engineers. The EPD report is also available for policy makers, government officials interested in sustainability, academic professors, and LCA professionals. This LCA report does not include product comparisons from other facilities.

DESCRIPTION OF PRODUCT AND SCOPE

This EPD reports on 142 concrete mixes manufactured at Cementos Moctezuma concrete facility in Tultepec, Estado de México, Mexico.

This LCA assumes the impacts from products manufactured in accordance with the standards outlined in this report. This LCA is a cradle-to-gate study, and therefore, stages extending beyond the plant gate are not included in this LCA. Excluded stages include transportation of the manufactured material to the construction site; on-site construction processes and components; building (infrastructure) use and maintenance; and "end-of-life" effects.

READY MIX CONCRETE DESIGN SUMMARY

The following tables provide a list of the ready-mix concrete products considered in this EPD along with key performance parameters.

Mix Designs: 0 to 15 MPa

Table 1: Declared products with Mix designs: 0 to 15MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
1	Convencional - f'c 100 - 7 dias	9.80 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
2	Convencional - f'c 100 - 3 dias	9.80 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
3	Convencional - f'c 100 - 28 dias	9.80 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
4	Convencional - f'c 100 - 14 dias	9.80 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
5	Convencional - f'c 150 - 7 dias	14.70 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary
6	Convencional - f'c 150 - 3 dias	14.70 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary
7	Convencional - f'c 150 - 28 dias	14.70 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary



8	Convencional - f'c 150 - 14 dias	14.70 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary
57	Relleno Fluido - f'c 30 - 7 dias	2.94 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
58	Relleno Fluido - f'c 30 - 3 dias	2.94 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
59	Relleno Fluido - f'c 30 - 28 dias	2.94 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
60	Relleno Fluido - f'c 30 - 14 dias	2.94 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
61	Relleno Fluido - f'c 15 - 7 dias	1.47 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
62	Relleno Fluido - f'c 15 - 3 dias	1.47 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
63	Relleno Fluido - f'c 15 - 28 dias	1.47 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
64	Relleno Fluido - f'c 15 - 14 dias	1.47 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
65	Relleno Fluido - f'c 20 - 7 dias	1.96 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
66	Relleno Fluido - f'c 20 - 3 dias	1.96 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
67	Relleno Fluido - f'c 20 - 28 dias	1.96 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
68	Relleno Fluido - f'c 20 - 14 dias	1.96 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
69	Relleno Fluido - f'c 25 - 7 dias	2.45 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary
70	Relleno Fluido - f'c 25 - 3 dias	2.45 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary
71	Relleno Fluido - f'c 25 - 28 dias	2.45 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary
72	Relleno Fluido - f'c 25 - 14 dias	2.45 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary



73	Relleno Fluido - f'c 40 - 7 dias	3.92 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
74	Relleno Fluido - f'c 40 - 3 dias	3.92 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
75	Relleno Fluido - f'c 40 - 28 dias	3.92 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
76	Relleno Fluido - f'c 40 - 14 dias	3.92 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
77	Relleno Fluido - f'c 50 - 7 dias	4.90 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
78	Relleno Fluido - f'c 50 - 3 dias	4.90 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
79	Relleno Fluido - f'c 50 - 28 dias	4.90 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
80	Relleno Fluido - f'c 50 - 14 dias	4.90 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
81	Relleno Fluido - f'c 60 - 7 dias	5.88 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
82	Relleno Fluido - f'c 60 - 3 dias	5.88 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
83	Relleno Fluido - f'c 60 - 28 dias	5.88 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
84	Relleno Fluido - f'c 60 - 14 dias	5.88 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
85	Relleno Fluido - f'c 70 - 7 dias	6.86 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary
86	Relleno Fluido - f'c 70 - 3 dias	6.86 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary
87	Relleno Fluido - f'c 70 - 28 dias	6.86 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary
88	Relleno Fluido - f'c 70 - 14 dias	6.86 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary



Mix Designs: 15 to 20 MPa

Table 2 Declared products with Mix designs: 15 to 20MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
9	Convencional - f'c 200 - 7 dias	19.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
10	Convencional - f'c 200 - 3 dias	19.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
11	Convencional - f'c 200 - 28 dias	19.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
12	Convencional - f'c 200 - 14 dias	19.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
127	Lanzado - f'c 200 - 7 dias	19.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
128	Lanzado - f'c 200 - 3 dias	19.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
129	Lanzado - f'c 200 - 28 dias	19.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
130	Lanzado - f'c 200 - 14 dias	19.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary

Mix Designs: 21 to 25 MPa

Table 3: Declared products with Mix designs: 21 to 25MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
13	Convencional - f'c 250 - 7 dias	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary



14	Convencional - f'c 250 - 3 dias	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
15	Convencional - f'c 250 - 28 dias	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
16	Convencional - f'c 250 - 14 dias	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
25	Estructural - f'c 250 - 7 dias	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
26	Estructural - f'c 250 - 3 dias	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
27	Estructural - f'c 250 - 28 dias	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
28	Estructural - f'c 250 - 14 dias	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
89	Modulo de ruptura - MR 35 - 7 dias	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
90	Modulo de ruptura - MR 35 - 3 dias	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
91	Modulo de ruptura - MR 35 - 28 dias	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
92	Modulo de ruptura - MR 35 - 14 dias	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
131	Lanzado - f'c 250 - 7 dias	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
132	Lanzado - f'c 250 - 3 dias	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
133	Lanzado - f'c 250 - 28 dias	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
134	Lanzado - f'c 250 - 14 dias	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary



Mix Designs: 26 to 30 MPa

Table 4: Declared products with Mix designs: 26 to 30MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
17	Convencional - f'c 300 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
18	Convencional - f'c 300 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
19	Convencional - f'c 300 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
20	Convencional - f'c 300 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
29	Estructural - f'c 300 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
30	Estructural - f'c 300 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
31	Estructural - f'c 300 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
32	Estructural - f'c 300 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
93	Modulo de ruptura - MR 38 - 7 dias	26.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
94	Modulo de ruptura - MR 38 - 3 dias	26.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
95	Modulo de ruptura - MR 38 - 28 dias	26.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
96	Modulo de ruptura - MR 38 - 14 dias	26.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
97	Modulo de ruptura - MR 40 - 7 dias	28.00 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
98	Modulo de ruptura - MR 40 - 3 dias	28.00 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
99	Modulo de ruptura - MR 40 - 28 dias	28.00 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary



100	Modulo de ruptura - MR 40 - 14 dias	28.00 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
101	Modulo de ruptura - MR 42 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
102	Modulo de ruptura - MR 42 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
103	Modulo de ruptura - MR 42 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
104	Modulo de ruptura - MR 42 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
113	Modulo de ruptura - MR 36 - 7 dias	25.20 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
114	Modulo de ruptura - MR 36 - 3 dias	25.20 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
115	Modulo de ruptura - MR 36 - 28 dias	25.20 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
116	Modulo de ruptura - MR 36 - 14 dias	25.20 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
117	Baja contracción - MR 38 - 28 dias	26.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
118	Baja contracción - MR 38 - 14 dias	26.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
119	Baja contracción - MR 40 - 28 dias	28.00 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
120	Baja contracción - MR 40 - 14 dias	28.00 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
121	Baja contracción - MR 42 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
122	Baja contracción - MR 42 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
135	Lanzado - f'c 300 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
136	Lanzado - f'c 300 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary



137	Lanzado - f'c 300 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
138	Lanzado - f'c 300 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary

Mix Designs: 31 to 35 MPa

Table 5: Declared products with Mix designs: 31 to 35MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
21	Convencional - f'c 350 - 7 dias	34.30 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
22	Convencional - f'c 350 - 3 dias	34.30 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
23	Convencional - f'c 350 - 28 dias	34.30 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
24	Convencional - f'c 350 - 14 dias	34.30 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
33	Estructural - f'c 350 - 7 dias	34.30 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
34	Estructural - f'c 350 - 3 dias	34.30 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
35	Estructural - f'c 350 - 28 dias	34.30 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
36	Estructural - f'c 350 - 14 dias	34.30 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
105	Modulo de ruptura - MR 45 - 7 dias	31.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
106	Modulo de ruptura - MR 45 - 3 dias	31.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
107	Modulo de ruptura - MR 45 - 28 dias	31.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
108	Modulo de ruptura - MR 45 - 14 dias	31.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary



109	Modulo de ruptura - MR 48 - 7 dias	33.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
110	Modulo de ruptura - MR 48 - 3 dias	33.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
111	Modulo de ruptura - MR 48 - 28 dias	33.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
112	Modulo de ruptura - MR 48 - 14 dias	33.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
123	Baja contracción - MR 45 - 28 dias	31.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
124	Baja contracción - MR 45 - 14 dias	31.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
125	Baja contracción - MR 48 - 28 dias	33.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
126	Baja contracción - MR 48 - 14 dias	33.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
139	Lanzado - f'c 350 - 7 dias	34.30 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
140	Lanzado - f'c 350 - 3 dias	34.30 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
141	Lanzado - f'c 350 - 28 dias	34.30 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
142	Lanzado - f'c 350 - 14 dias	34.30 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary

Mix Designs: 36 to 40 MPa

Table 6: Declared products with Mix designs: 36 to 40MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
37	Alta resistencia - f'c 400 - 7 dias	39.20 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary
38	Alta resistencia - f'c 400 - 3 dias	39.20 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary
39	Alta resistencia - f'c 400 - 28 dias	39.20 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary



40	Alta resistencia - f'c 400 - 14 dias	39.20 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary
----	---	---	-----------------------	------	-------------

Mix Designs: 41 to 45 MPa

Table 7: Declared products with Mix designs: 41 to 45MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
41	Alta resistencia - f'c 450 - 7 dias	44.10 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary
42	Alta resistencia - f'c 450 - 3 dias	44.10 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary
43	Alta resistencia - f'c 450 - 28 dias	44.10 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary
44	Alta resistencia - f'c 450 - 14 dias	44.10 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary

Mix Designs: 46 to 50 MPa

Table 7: Declared products with Mix designs: 46 to 50MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
45	Alta resistencia - f'c 500 - 7 dias	49.00 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary
46	Alta resistencia - f'c 500 - 3 dias	49.00 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary
47	Alta resistencia - f'c 500 - 28 dias	49.00 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary
48	Alta resistencia - f'c 500 - 14 dias	49.00 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary



Mix Designs: 51 to 55 MPa

Table 7: Declared products with Mix designs: 51 to 55MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
49	Alta resistencia - f'c 550 - 7 dias	53.90 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary
50	Alta resistencia - f'c 550 - 3 dias	53.90 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary
51	Alta resistencia - f'c 550 - 28 dias	53.90 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary
52	Alta resistencia - f'c 550 - 14 dias	53.90 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary

Mix Designs: 56 to 60 MPa

Table 7: Declared products with Mix designs: 56 to 60MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
53	Alta resistencia - f'c 600 - 7 dias	58.80 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary
54	Alta resistencia - f'c 600 - 3 dias	58.80 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary
55	Alta resistencia - f'c 600 - 28 dias	58.80 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary
56	Alta resistencia - f'c 600 - 14 dias	58.80 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary

READY MIX CONCRETE DESIGN COMPOSITION

The following figures provide mass breakdown (kg per functional unit) of the material composition of each ready mix concrete design considered. Please note that the presented breakdown has been randomly altered by +/-10%, and is therefore only an approximation; this manipulation is to ensure confidentiality.



Table 8: Ready mix concrete composition.

Product Components	Product Components
Cement	Proprietary
Aggregates	30-60.00
Others	0.01-5.00
Total	100.00

SYSTEM BOUNDARIES

The following figure depicts the cradle-to-gate system boundary considered in this study.

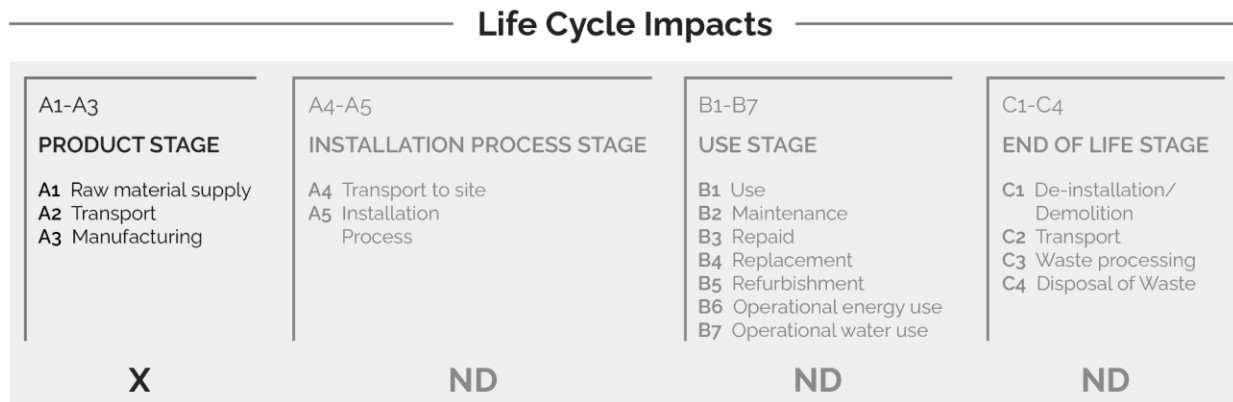


Figure 1: General life cycle phases for consideration in a construction works system

This is a Cradle-to-gate life cycle assessment and the following life cycle stages are included in the study:

- A1: Raw material supply (upstream processes) - Extraction, handling, and processing of the materials used in manufacturing the declared products in this LCA.
- A2: Transportation - Transportation of A1 materials from the supplier to the "gate" of the manufacturing facility (i.e., A3).
- A3: Manufacturing (core processes)- The energy and other utility inputs used to store, move, and manufacture the declared products and to operate the facility.

According to the PCR, the following figure illustrates the general activities and input requirements for producing ready mix concrete products and is not necessarily exhaustive.



System Boundary

<p>Raw Material Supply (A1)</p> <p>Cements & SCMs Aggregates Admixtures Batch Water Fibers & Pigments</p>	<p>Transport (A2)</p> <p>Truck, Rail, Ship Energy Carriers (fuels)</p>	<p>Manufacturing (A3)</p> <p>Energy Carriers (electricity and fuels) Ancillary Materials (lubricants, motor oil, cleaning chemicals, other consumables) Water (manufacturing water, including wash water for cement trucks, but excluding batch water) Waste (end of life treatment of ancillary materials and any packaging) 30% total fleet energy transit mix plants only</p>
--	---	---

Figure 2: General system inputs considered in the product system and categorized by modules in scope

In addition, according to the relevant PCR, the following requirements are excluded from this study:

- Production, manufacture and construction of A3 building/capital goods and infrastructure.
- Production and manufacture of steel production equipment, steel delivery vehicles, earth-moving equipment, and laboratory equipment.
- Personnel-related activities (travel, furniture, office supplies);
- Energy use is related to company management and sales activities.

For this LCA the manufacturing plant, owned and operated by Cementos Moctezuma, is located at their Tultepec facility in Estado de México, México. All operating data is formulated using the actual data from Cementos Moctezuma’s plant at the above location, including water, energy consumption and waste generation. All inputs for this system boundary are calculated for the plant.

This life cycle inventory was organized in a spreadsheet and was then input into an RStudio environment where pre-calculated LCIA results for relevant products/activities stemming from the ecoinvent v3.10 database and a local EPD database in combination with primary data from Cementos Moctezuma were utilized. Explanations of the contribution of each data source to this study are outlined in the section ‘Data Sources and Quality’. Further LCI details for each declared product are provided in the sections ‘Detailed LCI tables’ and ‘Transport tables’ of the detailed LCA report. A parameter uncertainty analysis was also performed where key statistical results (e.g. min/mean/max etc.) are provided in the detailed LCA report.

CUT-OFF CRITERIA

ISO 14044:2006 and the focus PCR requires the LCA model to contain a minimum of 95% of the total inflows (mass and energy) to the upstream and core modules be included in this study. The cut-off criteria were applied to all other processes unless otherwise noted above as follows. A 1% cut-off is considered for all renewable and non-renewable primary energy consumption and the total mass of inputs within a unit process where the total of the neglected inputs does not exceed 5%.

DATA SOURCES AND DATA QUALITY ASSESSMENT

Raw material transport: A combination of actual mode/distance combinations were assumed for key bulk materials whereas ecoinvent default multi-modal market mix distances were assumed for other inputs where no original data could be provided.





Electricity: The plant operates without utilizing grid electricity and instead relies on diesel generators for power generation.

Fuel required for machinery: Machinery-related fuel requirements were determined from direct Moctezuma information for the reference year 2023.

Waste generation: No High-level radioactive waste is generated on-site at this facility.

Recovered energy: There was no recovered energy on-site.

Recycled/reused material/components: The amount of returned concrete is based on Moctezuma primary data for the reference year, 2023.

Module A1 material losses: Due to lack of data, default loss factors were assumed.

Direct A3 emissions accounting: Direct emissions are modeled using fuel and technology appropriateecoinvent activities. See LCI input tables for details.

Waste transport requirements: Transportation distances are using estimated values. The waste hauler cannot guarantee the exact distances traveled due to the variation of route and actual location of disposal. Most waste disposal sites are near the plant therefore the 25 km distance is a representative estimate

Product transport requirements: Truck-related fuel requirements were determined from direct Moctezuma information for the reference year 2023.

The following tables depict a list of assumed life cycle inventory utilized in the LCA modeling to generate the impact results across the life cycle modules in scope. An assessment of the quality of each LCI activities utilized from various sources is also provided.

Table g: LCI inputs assumed for module A1 (i.e., raw material supply) Data Quality Assessment Key Fair=1, Good=2, Very Good =3.

Input	LCI.activity	Data.source	Geo	Year	Technology	Time	Geography	Reliability	Completeness
Andesite Sand	basalt quarry operation/basalt/RoW/kg; Note: modifications made (seeecoinvent activity changes table)	ecoinvent v3.10 in 2024	Edo. Mex	2024	2	3	1	3	3
Water	tap water production, conventional treatment/tap water/RoW/kg	ecoinvent v3.10 in 2024	Edo. Mex	2024	2	3	2	3	3
Limestone Gravel	limestone quarry operation/limestone, unprocessed/RoW/kg;	ecoinvent v3.10 in 2024	Edo. Mex	2024	2	3	1	3	3



	Note: modifications made (see ecoinvent activity changes table)								
Additives	chemical production, organic/chemical, organic/GLO/kg	ecoinvent v3.10 in 2024	Queretaro	2024	2	3	1	3	3
Cement	Gris CPC 40RS/cement/MX/tonne	Program Operator: Labeling Sustainability - EPD ID: bb72e77d-c6d2-4caabage-18cce10c7824	Morelos	23 November 2024	3	3	3	3	3
River Sand	sand quarry operation, extraction from river bed/sand/BR/kg; Note: modifications made (see ecoinvent activity changes table)	ecoinvent v3.10 in 2024	Morelos	2024	2	3	2	3	3

DATA QUALITY ASSESSMENT

Data quality/variability requirements, as specified in the PCR, are applied. This section describes the data quality achieved relative to the ISO 14044:2006 requirements. Data quality is judged based on its precision (measured, calculated or estimated), completeness (e.g., unreported emissions), consistency (degree of uniformity of the methodology applied within a study serving as a data source) and representativeness (geographical, temporal, and technological).

Precision: Through measurement and calculation, the manufacturers collected and provided primary data on their annual production. For accuracy, the LCA practitioner and 3rd Party Verifier validated the plant gate-to-gate data.

Completeness: All relevant specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled to represent the specified and declared products. Most relevant background materials and processes were taken from ecoinvent v3.10 LCI datasets where relatively recent region-specific electricity inputs were utilized. The most relevant EPDs requiring key A1 input were also utilized where readily available.

Consistency: To ensure consistency, the same modeling structure across the respective product systems was utilized for all inputs, which consisted of raw material inputs and ancillary material, energy flows, water resource inputs, product and co-products outputs, returned and recovered Ready Mix Concrete materials, emissions to air, water and soil, and waste recycling and treatment. The same background LCI datasets from the ecoinvent v3.10 database were used across all product systems. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted. The LCA team conducted mass and energy balances at the plant and selected process level to maintain a high level of consistency.



Reproducibility: Internal reproducibility is possible since the data and the models are stored and available in a machine-readable project file for all foreground and background processes, and in Labeling Sustainability's proprietary Ready Mix Concrete LCA calculator* for all production facility and product-specific calculations. A considerable level of transparency is provided throughout the detailed LCA report as the specifications and material quantity make-up for the declared products are presented and key primary and secondary LCI data sources are summarized. The provision of more detailed publicly accessible data to allow full external reproducibility was not possible due to reasons of confidentiality.

Labeling Sustainability has developed a proprietary tool that allows the calculation of PCR-compliant LCA results for Ready Mix Concrete product designs. The tool auto-calculates results by scaling base-unit technosphere inputs (i.e. 1 kg sand, 1 kWh electricity, etc.) to replicate the reference flow conversions that take place in any typical LCA software like openLCA or SimaPro. The tool was tested against several LCAs performed in openLCA and the tool generated identical results to those realized in openLCA across every impact category and inventory metric (where comparisons could be readily made).

Representativeness: The representativeness of the data is summarized as follows.

- Time related coverage of the manufacturing processes' primary collected data from 2023-01-01 to 2023-12-31.
- Upstream (background) LCI data was either the PCR specified default (if applicable) or more appropriate LCI datasets as found in the country-adjusted ecoinvent v3.10 database.
- Geographical coverage for inputs required by the A3 facility(ies) is representative of its region of focus; other upstream and background processes are based on US, North American, or global average data and adjusted to regional electricity mixes when relevant.
- Technological coverage is typical or average and specific to the participating facilities for all primary data.

ENVIRONMENTAL INDICATORS AND INVENTORY METRICS

Per the PCR, this EPD supports the life cycle impact assessment indicators and inventory metrics as listed in the tables below. As specified in the PCR, the most recent US EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI), impact categories were utilized as they provide a North American context for the mandatory category indicators to be included in the EPD. Additionally, the PCR requires a set of inventory metrics to be reported with the LCIA indicators.

Table 10: Life cycle impact categories and life cycle inventory metrics

ID	LCIA.indicators	Abbreviations	Units
1	Climate change: global warming potential (GWP100)	GWP100	kg CO2-eq
2	Ozone depletion: ozone depletion potential (ODP)	ODP	kg CFC-11-eq
3	Acidification: acidification potential (AP)	AP	kg SO2-eq
4	Eutrophication: eutrophication potential	EP	kg N-eq
5	Smog formation potential	SFP	kg O3-eq
6	Energy resources: non-renewable: abiotic depletion potential (ADP): fossil fuels	ADP _{fossil}	MJ

Inventory metrics



7	Inventory indicators ISO21930: Cumulative Energy Demand - renewable energy resources	RPRE	MJ
8	Inventory indicators ISO21930: Renewable primary resources with energy content used as material (i.e., PERM)	PRM	MJ
9	Inventory indicators ISO21930: Cumulative Energy Demand - non-renewable energy resources	NRPRE	MJ
10	Inventory indicators ISO21930: Non-renewable primary resources with energy content used as material (i.e., PENRM)	NRPRM	kg
11	Inventory indicators ISO21930: use of secondary material	SM	MJ
12	Inventory indicators ISO21930: use of renewable secondary fuels	RSF	MJ
13	Inventory indicators ISO21930: recovered energy	RE	MJ
14	Inventory indicators ISO21930: use of net fresh water	FW	m3
15	Inventory indicators ISO21930: hazardous waste disposed	HWD	kg
16	Inventory indicators ISO21930: non-hazardous waste disposed	NHWD	kg
17	Inventory indicators ISO21930: high-level radioactive waste disposed	HLRW	kg
18	Inventory indicators ISO21930: intermediate and low-level radioactive waste disposed	ILLRW	kg
19	Inventory indicators ISO21930: materials for recycling	MR	kg
20	Inventory indicators ISO21930: materials for energy recovery	MER	kg

It should be noted that emerging LCA impact categories and inventory items are still under development and can have high levels of uncertainty that preclude international acceptance pending further development. Use caution when interpreting data in any of the following categories.

- Renewable primary energy resources as energy (fuel);
- Renewable primary resources as material;
- Non-renewable primary resources as energy (fuel);
- Non-renewable primary resources as material;
- Secondary Materials;
- Renewable secondary fuels;
- Non-renewable secondary fuels;
- Recovered energy;
- Abiotic depletion potential for non-fossil mineral resources.
- Land use related impacts, for example on biodiversity and/or soil fertility;
- Toxicological aspects;
- Emissions from land use change [GWP 100 (land-use change)];
- Hazardous waste disposed;
- Non-hazardous waste disposed;
- High-level radioactive waste;
- Intermediate and low-level radioactive waste;
- Components for reuse;
- Materials for recycling;
- Materials for energy recovery;



- Recovered energy exported from the product system.

LIMITATIONS

This EPD is a declaration of potential environmental impact and does not support or provide definitive comparisons of the environmental performance of specific products. Only EPDs prepared from cradle-to-grave life cycle results and based on the same function and reference service life and quantified by the same functional unit can be used to assist purchasers and users in making informed comparisons between products.

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. Further, LCA offers a wide array of environmental impact indicators, and this EPD reports a collection of those, as specified by the PCR.

In addition to the impact results, this EPD provides several metrics related to resource consumption and waste generation. While this data may be informational in other ways, they do not provide a measure of impact on the environment.

TOTAL IMPACT SUMMARY

The following table reports the total LCA results for each product produced at the given ready mix concrete facility on a per 1m³ of concrete basis.

Table 11: **Total life cycle (across modules in scope) impact results for all mix designs, assuming the geometric mean point values on a per 1 m³ of concrete basis.**

a) Midpoint Impact Categories:

Indicator/LCI Metric	GWP100	ODP	AP	EP	SFP	ADP _{fossil}
Unit	kg CO ₂ -eq	kg CFC-11-eq	kg SO ₂ -eq	kg N-eq	kg O ₃ -eq	MJ
Alta resistencia - f'c 400 - 14 dias	428	3.30E-06	0.429	0.235	7.95	2610
Alta resistencia - f'c 400 - 28 dias	406	3.15E-06	0.414	0.225	7.72	2490
Alta resistencia - f'c 400 - 3 dias	504	3.84E-06	0.48	0.27	8.72	3020
Alta resistencia - f'c 400 - 7 dias	460	3.53E-06	0.45	0.25	8.27	2780
Alta resistencia - f'c 450 - 14 dias	470	3.60E-06	0.457	0.255	8.37	2840
Alta resistencia - f'c 450 - 28 dias	448	3.44E-06	0.442	0.244	8.14	2720
Alta resistencia - f'c 450 - 3 dias	546	4.14E-06	0.508	0.29	9.14	3250
Alta resistencia - f'c 450 - 7 dias	502	3.83E-06	0.478	0.269	8.69	3010
Alta resistencia - f'c 500 - 14 dias	511	3.89E-06	0.484	0.273	8.78	3060



Alta resistencia - f' c 500 - 28 días	488	3.73E-06	0.469	0.263	8.56	2940
Alta resistencia - f' c 500 - 3 días	587	4.43E-06	0.535	0.309	9.56	3480
Alta resistencia - f' c 500 - 7 días	542	4.11E-06	0.505	0.288	9.1	3230
Alta resistencia - f' c 550 - 14 días	564	4.31E-06	0.524	0.319	9.38	3370
Alta resistencia - f' c 550 - 28 días	541	4.15E-06	0.509	0.308	9.15	3250
Alta resistencia - f' c 550 - 3 días	640	4.86E-06	0.576	0.358	10.2	3790
Alta resistencia - f' c 550 - 7 días	595	4.54E-06	0.545	0.335	9.7	3550
Alta resistencia - f' c 600 - 14 días	613	4.65E-06	0.556	0.336	9.87	3630
Alta resistencia - f' c 600 - 28 días	590	4.49E-06	0.541	0.325	9.64	3510
Alta resistencia - f' c 600 - 3 días	689	5.19E-06	0.607	0.374	10.6	4050
Alta resistencia - f' c 600 - 7 días	644	4.87E-06	0.577	0.352	10.2	3810
Baja contracción - MR 38 - 14 días	352	2.87E-06	0.389	0.194	7.62	2300
Baja contracción - MR 38 - 28 días	330	2.72E-06	0.374	0.184	7.4	2180
Baja contracción - MR 40 - 14 días	362	2.93E-06	0.395	0.198	7.7	2350
Baja contracción - MR 40 - 28 días	340	2.78E-06	0.381	0.188	7.49	2230
Baja contracción - MR 42 - 14 días	373	3.01E-06	0.402	0.203	7.81	2410
Baja contracción - MR 42 - 28 días	351	2.86E-06	0.388	0.193	7.6	2290
Baja contracción - MR 45 - 14 días	392	3.14E-06	0.415	0.211	7.99	2500
Baja contracción - MR 45 - 28 días	370	2.99E-06	0.4	0.201	7.78	2390
Baja contracción - MR 48 - 14 días	412	3.28E-06	0.428	0.22	8.19	2610
Baja contracción - MR 48 - 28 días	390	3.13E-06	0.413	0.21	7.97	2500
Convencional - f' c 100 - 14 días	194	1.60E-06	0.264	0.109	5.41	1300
Convencional - f' c 100 - 28 días	172	1.45E-06	0.25	0.1	5.19	1180
Convencional - f' c 100 - 3 días	269	2.13E-06	0.314	0.137	6.16	1710
Convencional - f' c 100 - 7 días	225	1.82E-06	0.285	0.12	5.72	1470
Convencional - f' c 150 - 14 días	214	1.74E-06	0.277	0.116	5.61	1410



Convencional - f'c 150 - 28 dias	191	1.58E-06	0.263	0.108	5.39	1290
Convencional - f'c 150 - 3 dias	289	2.26E-06	0.326	0.144	6.36	1820
Convencional - f'c 150 - 7 dias	245	1.95E-06	0.298	0.127	5.92	1580
Convencional - f'c 200 - 14 dias	245	1.96E-06	0.3	0.128	5.97	1580
Convencional - f'c 200 - 28 dias	223	1.81E-06	0.285	0.12	5.75	1460
Convencional - f'c 200 - 3 dias	321	2.48E-06	0.349	0.156	6.71	1990
Convencional - f'c 200 - 7 dias	276	2.17E-06	0.32	0.14	6.27	1750
Convencional - f'c 250 - 14 dias	278	2.19E-06	0.321	0.141	6.3	1760
Convencional - f'c 250 - 28 dias	256	2.03E-06	0.307	0.133	6.08	1640
Convencional - f'c 250 - 3 dias	353	2.71E-06	0.37	0.169	7.04	2160
Convencional - f'c 250 - 7 dias	309	2.40E-06	0.341	0.152	6.6	1930
Convencional - f'c 300 - 14 dias	331	2.55E-06	0.355	0.16	6.81	2050
Convencional - f'c 300 - 28 dias	309	2.40E-06	0.341	0.152	6.59	1930
Convencional - f'c 300 - 3 dias	407	3.08E-06	0.405	0.188	7.56	2450
Convencional - f'c 300 - 7 dias	362	2.77E-06	0.376	0.172	7.12	2210
Convencional - f'c 350 - 14 dias	378	2.88E-06	0.386	0.178	7.29	2300
Convencional - f'c 350 - 28 dias	356	2.73E-06	0.372	0.17	7.07	2180
Convencional - f'c 350 - 3 dias	454	3.40E-06	0.436	0.206	8.04	2700
Convencional - f'c 350 - 7 dias	410	3.10E-06	0.407	0.19	7.6	2470
Estructural - f'c 250 - 14 dias	278	2.19E-06	0.321	0.141	6.3	1760
Estructural - f'c 250 - 28 dias	256	2.03E-06	0.307	0.133	6.08	1640
Estructural - f'c 250 - 3 dias	353	2.71E-06	0.37	0.169	7.04	2160
Estructural - f'c 250 - 7 dias	309	2.40E-06	0.341	0.152	6.6	1930
Estructural - f'c 300 - 14 dias	331	2.55E-06	0.355	0.16	6.81	2050
Estructural - f'c 300 - 28 dias	309	2.40E-06	0.341	0.152	6.59	1930
Estructural - f'c 300 - 3 dias	407	3.08E-06	0.405	0.188	7.56	2450



Estructural - f'c 300 - 7 dias	362	2.77E-06	0.376	0.172	7.12	2210
Estructural - f'c 350 - 14 dias	378	2.88E-06	0.386	0.178	7.29	2300
Estructural - f'c 350 - 28 dias	356	2.73E-06	0.372	0.17	7.07	2180
Estructural - f'c 350 - 3 dias	454	3.40E-06	0.436	0.206	8.04	2700
Estructural - f'c 350 - 7 dias	410	3.10E-06	0.407	0.19	7.6	2470
Lanzado - f'c 200 - 14 dias	377	2.90E-06	0.415	0.198	7.99	2340
Lanzado - f'c 200 - 28 dias	351	2.72E-06	0.4	0.189	7.78	2210
Lanzado - f'c 200 - 3 dias	420	3.20E-06	0.439	0.212	8.34	2570
Lanzado - f'c 200 - 7 dias	403	3.08E-06	0.43	0.206	8.2	2480
Lanzado - f'c 250 - 14 dias	403	3.08E-06	0.43	0.206	8.21	2480
Lanzado - f'c 250 - 28 dias	377	2.90E-06	0.415	0.198	8	2340
Lanzado - f'c 250 - 3 dias	446	3.38E-06	0.455	0.22	8.56	2710
Lanzado - f'c 250 - 7 dias	429	3.26E-06	0.445	0.215	8.43	2620
Lanzado - f'c 300 - 14 dias	438	3.32E-06	0.451	0.218	8.51	2670
Lanzado - f'c 300 - 28 dias	412	3.14E-06	0.436	0.209	8.3	2530
Lanzado - f'c 300 - 3 dias	481	3.62E-06	0.477	0.232	8.88	2890
Lanzado - f'c 300 - 7 dias	464	3.50E-06	0.466	0.227	8.73	2800
Lanzado - f'c 350 - 14 dias	477	3.59E-06	0.475	0.232	8.87	2870
Lanzado - f'c 350 - 28 dias	451	3.41E-06	0.46	0.223	8.65	2740
Lanzado - f'c 350 - 3 dias	521	3.89E-06	0.501	0.246	9.23	3100
Lanzado - f'c 350 - 7 dias	504	3.77E-06	0.491	0.241	9.09	3010
Modulo de ruptura - MR 35 - 14 dias	319	2.46E-06	0.346	0.146	6.67	1970
Modulo de ruptura - MR 35 - 28 dias	301	2.33E-06	0.334	0.14	6.48	1880
Modulo de ruptura - MR 35 - 3 dias	403	3.04E-06	0.401	0.175	7.52	2420
Modulo de ruptura - MR 35 - 7 dias	359	2.73E-06	0.372	0.16	7.08	2190
Modulo de ruptura - MR 36 - 14 dias	323	2.49E-06	0.349	0.148	6.71	1990



Modulo de ruptura - MR 36 - 28 dias	306	2.37E-06	0.337	0.141	6.53	1900
Modulo de ruptura - MR 36 - 3 dias	408	3.07E-06	0.404	0.177	7.57	2450
Modulo de ruptura - MR 36 - 7 dias	364	2.76E-06	0.375	0.162	7.12	2210
Modulo de ruptura - MR 38 - 14 dias	331	2.54E-06	0.354	0.15	6.79	2040
Modulo de ruptura - MR 38 - 28 dias	314	2.42E-06	0.342	0.144	6.61	1940
Modulo de ruptura - MR 38 - 3 dias	416	3.12E-06	0.409	0.18	7.65	2490
Modulo de ruptura - MR 38 - 7 dias	372	2.82E-06	0.38	0.164	7.2	2250
Modulo de ruptura - MR 40 - 14 dias	342	2.62E-06	0.361	0.154	6.9	2090
Modulo de ruptura - MR 40 - 28 dias	324	2.49E-06	0.349	0.148	6.72	2000
Modulo de ruptura - MR 40 - 3 dias	427	3.20E-06	0.417	0.184	7.76	2550
Modulo de ruptura - MR 40 - 7 dias	382	2.89E-06	0.387	0.168	7.31	2310
Modulo de ruptura - MR 42 - 14 dias	354	2.69E-06	0.368	0.158	7.02	2160
Modulo de ruptura - MR 42 - 28 dias	336	2.57E-06	0.357	0.152	6.83	2060
Modulo de ruptura - MR 42 - 3 dias	438	3.27E-06	0.424	0.188	7.87	2610
Modulo de ruptura - MR 42 - 7 dias	394	2.97E-06	0.395	0.172	7.42	2370
Modulo de ruptura - MR 45 - 14 dias	373	2.83E-06	0.381	0.165	7.22	2260
Modulo de ruptura - MR 45 - 28 dias	355	2.71E-06	0.369	0.159	7.03	2170
Modulo de ruptura - MR 45 - 3 dias	458	3.41E-06	0.437	0.194	8.07	2710
Modulo de ruptura - MR 45 - 7 dias	413	3.10E-06	0.408	0.179	7.62	2480
Modulo de ruptura - MR 48 - 14 dias	395	2.97E-06	0.395	0.172	7.43	2380
Modulo de ruptura - MR 48 - 28 dias	377	2.85E-06	0.383	0.166	7.25	2280
Modulo de ruptura - MR 48 - 3 dias	479	3.55E-06	0.451	0.202	8.29	2830
Modulo de ruptura - MR 48 - 7 dias	435	3.25E-06	0.422	0.186	7.84	2590
Relleno Fluido - f'c 15 - 14 dias	148	1.24E-06	0.213	0.0816	4.41	1020
Relleno Fluido - f'c 15 - 28 dias	126	1.09E-06	0.198	0.0744	4.18	900
Relleno Fluido - f'c 15 - 3 dias	233	1.81E-06	0.268	0.109	5.26	1470



Relleno Fluido - f'c 15 - 7 dias	188	1.51E-06	0.239	0.0945	4.81	1230
Relleno Fluido - f'c 20 - 14 dias	153	1.27E-06	0.215	0.083	4.46	1040
Relleno Fluido - f'c 20 - 28 dias	131	1.12E-06	0.201	0.0758	4.23	924
Relleno Fluido - f'c 20 - 3 dias	237	1.85E-06	0.271	0.11	5.31	1490
Relleno Fluido - f'c 20 - 7 dias	193	1.54E-06	0.242	0.0959	4.86	1260
Relleno Fluido - f'c 25 - 14 dias	158	1.31E-06	0.219	0.0847	4.51	1070
Relleno Fluido - f'c 25 - 28 dias	136	1.16E-06	0.204	0.0775	4.28	953
Relleno Fluido - f'c 25 - 3 dias	243	1.88E-06	0.274	0.112	5.36	1520
Relleno Fluido - f'c 25 - 7 dias	198	1.58E-06	0.245	0.0976	4.91	1280
Relleno Fluido - f'c 30 - 14 dias	164	1.34E-06	0.222	0.0865	4.56	1100
Relleno Fluido - f'c 30 - 28 dias	141	1.19E-06	0.208	0.0793	4.34	981
Relleno Fluido - f'c 30 - 3 dias	248	1.92E-06	0.278	0.114	5.41	1550
Relleno Fluido - f'c 30 - 7 dias	204	1.62E-06	0.249	0.0994	4.97	1310
Relleno Fluido - f'c 40 - 14 dias	177	1.43E-06	0.231	0.0908	4.7	1170
Relleno Fluido - f'c 40 - 28 dias	155	1.28E-06	0.217	0.0836	4.47	1050
Relleno Fluido - f'c 40 - 3 dias	261	2.01E-06	0.286	0.118	5.55	1620
Relleno Fluido - f'c 40 - 7 dias	217	1.71E-06	0.257	0.104	5.1	1380
Relleno Fluido - f'c 50 - 14 dias	192	1.54E-06	0.241	0.0957	4.85	1250
Relleno Fluido - f'c 50 - 28 dias	170	1.39E-06	0.226	0.0884	4.62	1130
Relleno Fluido - f'c 50 - 3 dias	276	2.11E-06	0.296	0.123	5.7	1700
Relleno Fluido - f'c 50 - 7 dias	232	1.81E-06	0.267	0.109	5.25	1470
Relleno Fluido - f'c 60 - 14 dias	210	1.66E-06	0.252	0.101	5.02	1350
Relleno Fluido - f'c 60 - 28 dias	188	1.51E-06	0.238	0.0942	4.8	1230
Relleno Fluido - f'c 60 - 3 dias	294	2.23E-06	0.307	0.129	5.87	1800
Relleno Fluido - f'c 60 - 7 dias	250	1.93E-06	0.279	0.114	5.43	1560
Relleno Fluido - f'c 70 - 14 dias	232	1.81E-06	0.267	0.108	5.24	1460



Relleno Fluido - f'c 70 - 28 dias	202	1.60E-06	0.251	0.0995	5.03	1310
Relleno Fluido - f'c 70 - 3 dias	316	2.38E-06	0.322	0.136	6.09	1910
Relleno Fluido - f'c 70 - 7 dias	272	2.08E-06	0.293	0.121	5.65	1680

b) Resource Inventory Metrics:

Indicator/LCI Metric	RPRE	PRM	NRPRE	NRPRM	SM	RSF	RE	FW
Unit	MJ	MJ	MJ	kg	MJ	MJ	MJ	m3
Alta resistencia - f'c 400 - 14 dias	87.5	3.07	86.4	1260	0.536	0.00508	0.235	0.493
Alta resistencia - f'c 400 - 28 dias	83.1	3	82.1	1190	0.517	0.00498	0.228	0.482
Alta resistencia - f'c 400 - 3 dias	102	3.29	101	1510	0.602	0.00544	0.26	0.534
Alta resistencia - f'c 400 - 7 dias	93.6	3.16	92.5	1360	0.563	0.00523	0.245	0.51
Alta resistencia - f'c 450 - 14 dias	95.7	3.19	94.6	1400	0.573	0.00528	0.249	0.518
Alta resistencia - f'c 450 - 28 dias	91.3	3.13	90.2	1330	0.554	0.00518	0.241	0.508
Alta resistencia - f'c 450 - 3 dias	111	3.41	109	1640	0.638	0.00565	0.274	0.559
Alta resistencia - f'c 450 - 7 dias	102	3.28	101	1500	0.6	0.00543	0.259	0.535
Alta resistencia - f'c 500 - 14 dias	104	3.3	102	1530	0.607	0.00548	0.262	0.539
Alta resistencia - f'c 500 - 28 dias	99.3	3.24	98.1	1460	0.588	0.00537	0.255	0.527
Alta resistencia - f'c 500 - 3 dias	119	3.52	117	1770	0.673	0.00584	0.287	0.579
Alta resistencia - f'c 500 - 7 dias	110	3.39	109	1630	0.634	0.00563	0.272	0.556
Alta resistencia - f'c 550 - 14 dias	115	3.45	113	1700	0.657	0.00578	0.29	0.579
Alta resistencia - f'c 550 - 28 dias	110	3.39	109	1630	0.638	0.00566	0.282	0.566
Alta resistencia - f'c 550 - 3 dias	130	3.67	128	1950	0.724	0.00615	0.317	0.622
Alta resistencia - f'c 550 - 7 dias	121	3.54	119	1800	0.685	0.00593	0.301	0.597
Alta resistencia - f'c 600 - 14 dias	124	3.59	123	1860	0.698	0.006	0.304	0.6
Alta resistencia - f'c 600 - 28 dias	120	3.53	118	1790	0.679	0.00589	0.296	0.588
Alta resistencia - f'c 600 - 3 dias	139	3.81	138	2100	0.764	0.00636	0.33	0.641



Alta resistencia - f'c 600 - 7 dias	131	3.68	129	1960	0.726	0.00616	0.315	0.618
Baja contracción - MR 38 - 14 dias	71.2	2.81	70.3	977	0.548	0.00587	0.232	0.574
Baja contracción - MR 38 - 28 dias	66.8	2.75	66	906	0.532	0.00579	0.226	0.568
Baja contracción - MR 40 - 14 dias	73.1	2.84	72.2	1010	0.555	0.00589	0.234	0.577
Baja contracción - MR 40 - 28 dias	68.7	2.78	67.9	937	0.538	0.00582	0.228	0.571
Baja contracción - MR 42 - 14 dias	75.3	2.88	74.4	1050	0.563	0.00592	0.237	0.582
Baja contracción - MR 42 - 28 dias	71	2.81	70.1	974	0.547	0.00585	0.231	0.574
Baja contracción - MR 45 - 14 dias	79	2.93	78	1110	0.578	0.00599	0.243	0.588
Baja contracción - MR 45 - 28 dias	74.6	2.87	73.7	1030	0.561	0.00592	0.237	0.579
Baja contracción - MR 48 - 14 dias	83	2.99	82	1170	0.593	0.00606	0.249	0.595
Baja contracción - MR 48 - 28 dias	78.6	2.93	77.7	1100	0.576	0.00598	0.242	0.586
Convencional - f'c 100 - 14 dias	40.3	2.4	39.8	513	0.329	0.0039	0.145	0.375
Convencional - f'c 100 - 28 dias	35.9	2.33	35.5	442	0.31	0.00379	0.139	0.364
Convencional - f'c 100 - 3 dias	55	2.62	54.3	753	0.393	0.00424	0.167	0.411
Convencional - f'c 100 - 7 dias	46.3	2.49	45.8	612	0.355	0.00404	0.154	0.39
Convencional - f'c 150 - 14 dias	44.1	2.45	43.5	575	0.346	0.00399	0.151	0.384
Convencional - f'c 150 - 28 dias	39.7	2.39	39.2	505	0.327	0.00388	0.145	0.374
Convencional - f'c 150 - 3 dias	58.8	2.68	58.1	815	0.409	0.00433	0.172	0.422
Convencional - f'c 150 - 7 dias	50.1	2.55	49.5	674	0.372	0.00413	0.16	0.4
Convencional - f'c 200 - 14 dias	50.5	2.55	49.8	674	0.374	0.00415	0.162	0.4
Convencional - f'c 200 - 28 dias	46.1	2.48	45.6	603	0.355	0.00405	0.156	0.39
Convencional - f'c 200 - 3 dias	65.2	2.77	64.3	914	0.437	0.00449	0.183	0.438
Convencional - f'c 200 - 7 dias	56.5	2.64	55.8	773	0.4	0.00429	0.171	0.417
Convencional - f'c 250 - 14 dias	56.9	2.64	56.2	779	0.402	0.0043	0.171	0.416
Convencional - f'c 250 - 28 dias	52.6	2.58	51.9	708	0.383	0.0042	0.165	0.406
Convencional - f'c 250 - 3 dias	71.6	2.86	70.7	1020	0.465	0.00465	0.192	0.453



Convencional - f c 250 - 7 dias	62.9	2.73	62.2	878	0.428	0.00445	0.18	0.431
Convencional - f c 300 - 14 dias	67.3	2.8	66.4	948	0.447	0.00455	0.186	0.451
Convencional - f c 300 - 28 dias	62.9	2.73	62.2	878	0.428	0.00444	0.18	0.441
Convencional - f c 300 - 3 dias	82	3.02	81	1190	0.51	0.00489	0.207	0.488
Convencional - f c 300 - 7 dias	73.3	2.89	72.4	1050	0.473	0.00469	0.195	0.467
Convencional - f c 350 - 14 dias	76.5	2.93	75.5	1100	0.486	0.00476	0.2	0.473
Convencional - f c 350 - 28 dias	72.2	2.87	71.3	1030	0.468	0.00466	0.193	0.463
Convencional - f c 350 - 3 dias	91.2	3.15	90.1	1340	0.55	0.00511	0.221	0.51
Convencional - f c 350 - 7 dias	82.6	3.02	81.5	1200	0.513	0.00491	0.208	0.488
Estructural - f c 250 - 14 dias	56.9	2.64	56.2	779	0.402	0.0043	0.171	0.416
Estructural - f c 250 - 28 dias	52.6	2.58	51.9	708	0.383	0.0042	0.165	0.406
Estructural - f c 250 - 3 dias	71.6	2.86	70.7	1020	0.465	0.00465	0.192	0.453
Estructural - f c 250 - 7 dias	62.9	2.73	62.2	878	0.428	0.00445	0.18	0.431
Estructural - f c 300 - 14 dias	67.3	2.8	66.4	948	0.447	0.00455	0.186	0.451
Estructural - f c 300 - 28 dias	62.9	2.73	62.2	878	0.428	0.00444	0.18	0.441
Estructural - f c 300 - 3 dias	82	3.02	81	1190	0.51	0.00489	0.207	0.488
Estructural - f c 300 - 7 dias	73.3	2.89	72.4	1050	0.473	0.00469	0.195	0.467
Estructural - f c 350 - 14 dias	76.5	2.93	75.5	1100	0.486	0.00476	0.2	0.473
Estructural - f c 350 - 28 dias	72.2	2.87	71.3	1030	0.468	0.00466	0.193	0.463
Estructural - f c 350 - 3 dias	91.2	3.15	90.1	1340	0.55	0.00511	0.221	0.51
Estructural - f c 350 - 7 dias	82.6	3.02	81.5	1200	0.513	0.00491	0.208	0.488
Lanzado - f c 200 - 14 dias	81.2	2.9	80.4	1070	0.505	0.00499	0.24	0.489
Lanzado - f c 200 - 28 dias	76.4	2.83	75.7	982	0.485	0.00489	0.235	0.478
Lanzado - f c 200 - 3 dias	89.2	3.03	88.2	1210	0.539	0.00515	0.247	0.507
Lanzado - f c 200 - 7 dias	86	2.98	85.1	1150	0.526	0.00509	0.245	0.5
Lanzado - f c 250 - 14 dias	86.1	2.98	85.1	1150	0.526	0.00509	0.245	0.5



Lanzado - f c 250 - 28 dias	81.2	2.9	80.4	1070	0.505	0.00499	0.24	0.489
Lanzado - f c 250 - 3 dias	94.1	3.11	93.1	1290	0.56	0.00526	0.253	0.52
Lanzado - f c 250 - 7 dias	90.9	3.06	89.9	1240	0.547	0.00519	0.25	0.511
Lanzado - f c 300 - 14 dias	92.6	3.08	91.6	1260	0.554	0.00523	0.252	0.516
Lanzado - f c 300 - 28 dias	87.8	3.01	86.8	1180	0.533	0.00513	0.247	0.506
Lanzado - f c 300 - 3 dias	101	3.21	99.6	1410	0.589	0.0054	0.261	0.536
Lanzado - f c 300 - 7 dias	97.5	3.16	96.4	1350	0.575	0.00534	0.258	0.529
Lanzado - f c 350 - 14 dias	100	3.2	99	1390	0.586	0.0054	0.261	0.534
Lanzado - f c 350 - 28 dias	95.2	3.12	94.2	1310	0.565	0.0053	0.256	0.523
Lanzado - f c 350 - 3 dias	108	3.33	107	1530	0.621	0.00557	0.27	0.553
Lanzado - f c 350 - 7 dias	105	3.28	104	1480	0.607	0.0055	0.267	0.545
Modulo de ruptura - MR 35 - 14 dias	64	2.76	63.2	908	0.437	0.00453	0.175	0.447
Modulo de ruptura - MR 35 - 28 dias	60.5	2.71	59.7	852	0.421	0.00444	0.17	0.439
Modulo de ruptura - MR 35 - 3 dias	80.5	3.01	79.5	1180	0.508	0.00492	0.199	0.485
Modulo de ruptura - MR 35 - 7 dias	71.8	2.88	70.9	1030	0.471	0.00472	0.186	0.464
Modulo de ruptura - MR 36 - 14 dias	64.9	2.78	64	922	0.44	0.00455	0.176	0.447
Modulo de ruptura - MR 36 - 28 dias	61.4	2.72	60.6	866	0.425	0.00447	0.171	0.44
Modulo de ruptura - MR 36 - 3 dias	81.4	3.02	80.4	1190	0.512	0.00495	0.2	0.487
Modulo de ruptura - MR 36 - 7 dias	72.7	2.89	71.8	1050	0.474	0.00474	0.188	0.467
Modulo de ruptura - MR 38 - 14 dias	66.4	2.8	65.6	948	0.447	0.00459	0.179	0.453
Modulo de ruptura - MR 38 - 28 dias	62.9	2.75	62.1	891	0.432	0.0045	0.174	0.444



Modulo de ruptura - MR 38 - 3 dias	83	3.04	81.9	1220	0.519	0.00498	0.202	0.492
Modulo de ruptura - MR 38 - 7 dias	74.3	2.92	73.3	1070	0.481	0.00478	0.19	0.471
Modulo de ruptura - MR 40 - 14 dias	68.5	2.83	67.6	981	0.456	0.00464	0.182	0.457
Modulo de ruptura - MR 40 - 28 dias	65	2.78	64.2	925	0.441	0.00455	0.176	0.448
Modulo de ruptura - MR 40 - 3 dias	85	3.07	84	1250	0.528	0.00503	0.205	0.496
Modulo de ruptura - MR 40 - 7 dias	76.3	2.95	75.4	1110	0.49	0.00483	0.193	0.475
Modulo de ruptura - MR 42 - 14 dias	70.8	2.86	69.8	1020	0.466	0.00469	0.185	0.462
Modulo de ruptura - MR 42 - 28 dias	67.3	2.81	66.4	962	0.451	0.00461	0.18	0.455
Modulo de ruptura - MR 42 - 3 dias	87.3	3.11	86.2	1290	0.537	0.00509	0.208	0.502
Modulo de ruptura - MR 42 - 7 dias	78.6	2.98	77.6	1140	0.5	0.00488	0.196	0.481
Modulo de ruptura - MR 45 - 14 dias	74.6	2.92	73.6	1080	0.482	0.00478	0.19	0.47
Modulo de ruptura - MR 45 - 28 dias	71.1	2.87	70.2	1020	0.467	0.0047	0.185	0.461
Modulo de ruptura - MR 45 - 3 dias	91.1	3.16	90	1350	0.554	0.00518	0.214	0.51
Modulo de ruptura - MR 45 - 7 dias	82.4	3.04	81.4	1210	0.516	0.00497	0.201	0.489
Modulo de ruptura - MR 48 - 14 dias	78.8	2.98	77.7	1150	0.5	0.00488	0.196	0.48
Modulo de ruptura - MR 48 - 28 dias	75.3	2.93	74.3	1090	0.485	0.00479	0.191	0.471
Modulo de ruptura - MR 48 - 3 dias	95.3	3.22	94.1	1410	0.572	0.00528	0.22	0.52



Modulo de ruptura - MR 48 - 7 dias	86.6	3.1	85.5	1270	0.534	0.00507	0.207	0.499
Relleno Fluido - f'c 15 - 14 dias	31.2	2.28	30.8	380	0.267	0.00324	0.119	0.362
Relleno Fluido - f'c 15 - 28 dias	26.8	2.21	26.5	310	0.248	0.00313	0.113	0.351
Relleno Fluido - f'c 15 - 3 dias	47.6	2.52	47.1	647	0.338	0.00362	0.141	0.4
Relleno Fluido - f'c 15 - 7 dias	39	2.39	38.5	506	0.301	0.00342	0.13	0.38
Relleno Fluido - f'c 20 - 14 dias	32	2.29	31.7	394	0.271	0.00326	0.12	0.365
Relleno Fluido - f'c 20 - 28 dias	27.7	2.22	27.4	324	0.252	0.00315	0.114	0.354
Relleno Fluido - f'c 20 - 3 dias	48.5	2.54	47.9	661	0.342	0.00364	0.143	0.403
Relleno Fluido - f'c 20 - 7 dias	39.9	2.41	39.4	520	0.305	0.00344	0.131	0.382
Relleno Fluido - f'c 25 - 14 dias	33.1	2.31	32.7	411	0.276	0.00328	0.122	0.367
Relleno Fluido - f'c 25 - 28 dias	28.7	2.24	28.4	341	0.257	0.00318	0.116	0.358
Relleno Fluido - f'c 25 - 3 dias	49.6	2.55	48.9	678	0.347	0.00367	0.144	0.406
Relleno Fluido - f'c 25 - 7 dias	40.9	2.42	40.4	537	0.309	0.00347	0.132	0.386
Relleno Fluido - f'c 30 - 14 dias	34.1	2.32	33.7	428	0.28	0.00331	0.123	0.372
Relleno Fluido - f'c 30 - 28 dias	29.8	2.26	29.4	358	0.261	0.0032	0.117	0.361
Relleno Fluido - f'c 30 - 3 dias	50.6	2.57	50	694	0.351	0.0037	0.146	0.41
Relleno Fluido - f'c 30 - 7 dias	41.9	2.44	41.4	554	0.314	0.00349	0.134	0.39
Relleno Fluido - f'c 40 - 14 dias	36.7	2.36	36.3	470	0.292	0.00337	0.127	0.378
Relleno Fluido - f'c 40 - 28 dias	32.4	2.29	32	400	0.273	0.00327	0.121	0.369
Relleno Fluido - f'c 40 - 3 dias	53.2	2.61	52.5	736	0.363	0.00376	0.149	0.418
Relleno Fluido - f'c 40 - 7 dias	44.5	2.48	44	596	0.325	0.00356	0.137	0.398
Relleno Fluido - f'c 50 - 14 dias	39.7	2.4	39.2	518	0.304	0.00344	0.131	0.386
Relleno Fluido - f'c 50 - 28 dias	35.3	2.34	34.9	448	0.285	0.00333	0.125	0.377
Relleno Fluido - f'c 50 - 3 dias	56.1	2.65	55.4	784	0.375	0.00383	0.153	0.424
Relleno Fluido - f'c 50 - 7 dias	47.5	2.52	46.9	644	0.338	0.00362	0.141	0.404



Relleno Fluido - f'c 60 - 14 dias	43.1	2.46	42.6	574	0.319	0.00352	0.135	0.394
Relleno Fluido - f'c 60 - 28 dias	38.8	2.39	38.3	504	0.3	0.00341	0.129	0.383
Relleno Fluido - f'c 60 - 3 dias	59.6	2.7	58.9	840	0.39	0.00391	0.158	0.432
Relleno Fluido - f'c 60 - 7 dias	50.9	2.57	50.3	700	0.353	0.0037	0.146	0.413
Relleno Fluido - f'c 70 - 14 dias	47.5	2.52	46.9	644	0.338	0.00362	0.141	0.404
Relleno Fluido - f'c 70 - 28 dias	42.3	2.43	41.8	545	0.314	0.0035	0.138	0.395
Relleno Fluido - f'c 70 - 3 dias	63.9	2.77	63.1	910	0.408	0.004	0.164	0.443
Relleno Fluido - f'c 70 - 7 dias	55.3	2.64	54.6	770	0.371	0.0038	0.152	0.422

c) Waste/output Inventory Metrics:

Indicator/LCI Metric	HWD	NHWD	HLRW	ILLRW	MR	MER
Unit	kg	kg	kg	kg	kg	kg
Alta resistencia - f'c 400 - 14 dias	3.16	77.6	0.000176	0.00062	0.0379	6.56E-05
Alta resistencia - f'c 400 - 28 dias	3.04	74.5	0.000169	0.00059	0.0361	6.35E-05
Alta resistencia - f'c 400 - 3 dias	3.57	88.2	0.000202	0.000719	0.0443	7.28E-05
Alta resistencia - f'c 400 - 7 dias	3.33	82	0.000187	0.000661	0.0405	6.86E-05
Alta resistencia - f'c 450 - 14 dias	3.39	83.5	0.00019	0.000675	0.0414	6.96E-05
Alta resistencia - f'c 450 - 28 dias	3.27	80.4	0.000183	0.000645	0.0396	6.75E-05
Alta resistencia - f'c 450 - 3 dias	3.8	94	0.000216	0.000775	0.0478	7.68E-05
Alta resistencia - f'c 450 - 7 dias	3.56	87.8	0.000201	0.000716	0.044	7.26E-05
Alta resistencia - f'c 500 - 14 dias	3.6	89.1	0.000204	0.000728	0.0448	7.34E-05
Alta resistencia - f'c 500 - 28 dias	3.48	86	0.000197	0.000698	0.0429	7.13E-05
Alta resistencia - f'c 500 - 3 dias	4.02	99.7	0.00023	0.000828	0.0512	8.07E-05
Alta resistencia - f'c 500 - 7 dias	3.78	93.5	0.000215	0.000769	0.0474	7.64E-05
Alta resistencia - f'c 550 - 14 dias	3.97	98.6	0.000225	0.000805	0.0494	8.05E-05
Alta resistencia - f'c 550 - 28 dias	3.85	95.3	0.000218	0.000775	0.0475	7.82E-05
Alta resistencia - f'c 550 - 3 dias	4.4	110	0.000252	0.000907	0.0558	8.80E-05



Alta resistencia - f' c 550 - 7 días	4.15	103	0.000236	0.000847	0.052	8.36E-05
Alta resistencia - f' c 600 - 14 días	4.22	105	0.000241	0.000868	0.0535	8.46E-05
Alta resistencia - f' c 600 - 28 días	4.09	102	0.000233	0.000838	0.0516	8.24E-05
Alta resistencia - f' c 600 - 3 días	4.64	116	0.000267	0.000969	0.0599	9.20E-05
Alta resistencia - f' c 600 - 7 días	4.39	109	0.000252	0.00091	0.0561	8.78E-05
Baja contracción - MR 38 - 14 días	2.88	68.3	0.000149	0.000511	0.0312	6.63E-05
Baja contracción - MR 38 - 28 días	2.77	65.3	0.000142	0.000482	0.0294	6.45E-05
Baja contracción - MR 40 - 14 días	2.93	69.5	0.000152	0.000524	0.032	6.70E-05
Baja contracción - MR 40 - 28 días	2.82	66.6	0.000145	0.000495	0.0302	6.53E-05
Baja contracción - MR 42 - 14 días	2.99	71	0.000156	0.000538	0.033	6.80E-05
Baja contracción - MR 42 - 28 días	2.87	68.1	0.000149	0.00051	0.0311	6.62E-05
Baja contracción - MR 45 - 14 días	3.08	73.5	0.000162	0.000563	0.0345	6.95E-05
Baja contracción - MR 45 - 28 días	2.97	70.6	0.000155	0.000534	0.0327	6.77E-05
Baja contracción - MR 48 - 14 días	3.19	76.2	0.000169	0.000589	0.0362	7.12E-05
Baja contracción - MR 48 - 28 días	3.07	73.3	0.000162	0.000561	0.0344	6.94E-05
Convencional - f' c 100 - 14 días	1.78	42.7	9.14E-05	0.000298	0.018	4.12E-05
Convencional - f' c 100 - 28 días	1.67	39.8	8.43E-05	0.00027	0.0161	3.92E-05
Convencional - f' c 100 - 3 días	2.17	52.5	0.000116	0.000395	0.0243	4.77E-05
Convencional - f' c 100 - 7 días	1.94	46.8	0.000102	0.000338	0.0206	4.39E-05
Convencional - f' c 150 - 14 días	1.88	45.2	9.77E-05	0.000323	0.0196	4.29E-05
Convencional - f' c 150 - 28 días	1.77	42.4	9.06E-05	0.000295	0.0178	4.09E-05
Convencional - f' c 150 - 3 días	2.27	55.1	0.000122	0.00042	0.0259	4.94E-05
Convencional - f' c 150 - 7 días	2.04	49.3	0.000108	0.000363	0.0222	4.56E-05
Convencional - f' c 200 - 14 días	2.06	49.8	0.000109	0.000367	0.0223	4.59E-05
Convencional - f' c 200 - 28 días	1.95	47	0.000102	0.000339	0.0205	4.41E-05
Convencional - f' c 200 - 3 días	2.45	59.6	0.000134	0.000463	0.0286	5.25E-05



Convencional - f'c 200 - 7 dias	2.22	53.9	0.00012	0.000407	0.0249	4.87E-05
Convencional - f'c 250 - 14 dias	2.23	54.1	0.00012	0.000409	0.0251	4.88E-05
Convencional - f'c 250 - 28 dias	2.12	51.2	0.000113	0.000381	0.0232	4.69E-05
Convencional - f'c 250 - 3 dias	2.61	63.9	0.000144	0.000506	0.0313	5.54E-05
Convencional - f'c 250 - 7 dias	2.39	58.1	0.00013	0.000449	0.0276	5.15E-05
Convencional - f'c 300 - 14 dias	2.5	61.1	0.000137	0.000477	0.0295	5.35E-05
Convencional - f'c 300 - 28 dias	2.39	58.3	0.00013	0.000449	0.0276	5.15E-05
Convencional - f'c 300 - 3 dias	2.88	71	0.000162	0.000574	0.0357	6.00E-05
Convencional - f'c 300 - 7 dias	2.66	65.2	0.000147	0.000517	0.0321	5.62E-05
Convencional - f'c 350 - 14 dias	2.74	67.3	0.000153	0.000538	0.0334	5.76E-05
Convencional - f'c 350 - 28 dias	2.63	64.4	0.000146	0.00051	0.0316	5.57E-05
Convencional - f'c 350 - 3 dias	3.13	77.2	0.000177	0.000635	0.0397	6.42E-05
Convencional - f'c 350 - 7 dias	2.9	71.4	0.000163	0.000578	0.036	6.03E-05
Estructural - f'c 250 - 14 dias	2.23	54.1	0.00012	0.000409	0.0251	4.88E-05
Estructural - f'c 250 - 28 dias	2.12	51.2	0.000113	0.000381	0.0232	4.69E-05
Estructural - f'c 250 - 3 dias	2.61	63.9	0.000144	0.000506	0.0313	5.54E-05
Estructural - f'c 250 - 7 dias	2.39	58.1	0.00013	0.000449	0.0276	5.15E-05
Estructural - f'c 300 - 14 dias	2.5	61.1	0.000137	0.000477	0.0295	5.35E-05
Estructural - f'c 300 - 28 dias	2.39	58.3	0.00013	0.000449	0.0276	5.15E-05
Estructural - f'c 300 - 3 dias	2.88	71	0.000162	0.000574	0.0357	6.00E-05
Estructural - f'c 300 - 7 dias	2.66	65.2	0.000147	0.000517	0.0321	5.62E-05
Estructural - f'c 350 - 14 dias	2.74	67.3	0.000153	0.000538	0.0334	5.76E-05
Estructural - f'c 350 - 28 dias	2.63	64.4	0.000146	0.00051	0.0316	5.57E-05
Estructural - f'c 350 - 3 dias	3.13	77.2	0.000177	0.000635	0.0397	6.42E-05
Estructural - f'c 350 - 7 dias	2.9	71.4	0.000163	0.000578	0.036	6.03E-05
Lanzado - f'c 200 - 14 dias	3.16	76	0.000185	0.000604	0.0351	6.34E-05



Lanzado - f' c 200 - 28 dias	3.05	73.1	0.000179	0.000574	0.033	6.15E-05
Lanzado - f' c 200 - 3 dias	3.33	80.7	0.000196	0.000653	0.0385	6.64E-05
Lanzado - f' c 200 - 7 dias	3.27	78.8	0.000192	0.000633	0.0372	6.53E-05
Lanzado - f' c 250 - 14 dias	3.27	78.9	0.000192	0.000634	0.0372	6.53E-05
Lanzado - f' c 250 - 28 dias	3.16	76	0.000185	0.000604	0.0351	6.34E-05
Lanzado - f' c 250 - 3 dias	3.45	83.7	0.000203	0.000683	0.0406	6.84E-05
Lanzado - f' c 250 - 7 dias	3.38	81.8	0.000199	0.000664	0.0392	6.72E-05
Lanzado - f' c 300 - 14 dias	3.42	82.9	0.000202	0.000675	0.04	6.80E-05
Lanzado - f' c 300 - 28 dias	3.31	80	0.000195	0.000645	0.0379	6.61E-05
Lanzado - f' c 300 - 3 dias	3.61	87.8	0.000213	0.000725	0.0434	7.12E-05
Lanzado - f' c 300 - 7 dias	3.54	85.9	0.000209	0.000706	0.0421	7.00E-05
Lanzado - f' c 350 - 14 dias	3.6	87.6	0.000213	0.000722	0.0432	7.11E-05
Lanzado - f' c 350 - 28 dias	3.49	84.7	0.000206	0.000692	0.0411	6.91E-05
Lanzado - f' c 350 - 3 dias	3.79	92.6	0.000224	0.000773	0.0466	7.43E-05
Lanzado - f' c 350 - 7 dias	3.72	90.6	0.00022	0.000753	0.0453	7.31E-05
Modulo de ruptura - MR 35 - 14 dias	2.37	57.9	0.000128	0.00045	0.0282	5.16E-05
Modulo de ruptura - MR 35 - 28 dias	2.28	55.6	0.000122	0.000427	0.0267	5.00E-05
Modulo de ruptura - MR 35 - 3 dias	2.8	68.9	0.000156	0.000559	0.0352	5.89E-05
Modulo de ruptura - MR 35 - 7 dias	2.58	63.1	0.000141	0.000502	0.0315	5.50E-05
Modulo de ruptura - MR 36 - 14 dias	2.39	58.5	0.000129	0.000456	0.0286	5.19E-05
Modulo de ruptura - MR 36 - 28 dias	2.3	56.2	0.000124	0.000433	0.0271	5.04E-05
Modulo de ruptura - MR 36 - 3 dias	2.82	69.5	0.000157	0.000565	0.0356	5.93E-05
Modulo de ruptura - MR 36 - 7 dias	2.6	63.7	0.000143	0.000508	0.0319	5.54E-05
Modulo de ruptura - MR 38 - 14 dias	2.43	59.5	0.000132	0.000466	0.0292	5.26E-05
Modulo de ruptura - MR 38 - 28 dias	2.34	57.2	0.000126	0.000443	0.0277	5.11E-05
Modulo de ruptura - MR 38 - 3 dias	2.86	70.5	0.00016	0.000575	0.0363	5.99E-05



Modulo de ruptura - MR 38 - 7 dias	2.64	64.7	0.000145	0.000518	0.0326	5.61E-05
Modulo de ruptura - MR 40 - 14 dias	2.49	60.9	0.000135	0.00048	0.0301	5.35E-05
Modulo de ruptura - MR 40 - 28 dias	2.4	58.6	0.00013	0.000457	0.0286	5.20E-05
Modulo de ruptura - MR 40 - 3 dias	2.92	71.9	0.000163	0.000589	0.0371	6.09E-05
Modulo de ruptura - MR 40 - 7 dias	2.69	66.1	0.000149	0.000532	0.0334	5.70E-05
Modulo de ruptura - MR 42 - 14 dias	2.55	62.4	0.000139	0.000495	0.0311	5.45E-05
Modulo de ruptura - MR 42 - 28 dias	2.45	60.1	0.000133	0.000472	0.0296	5.30E-05
Modulo de ruptura - MR 42 - 3 dias	2.98	73.4	0.000167	0.000604	0.0381	6.19E-05
Modulo de ruptura - MR 42 - 7 dias	2.75	67.6	0.000152	0.000546	0.0344	5.80E-05
Modulo de ruptura - MR 45 - 14 dias	2.65	64.9	0.000146	0.00052	0.0327	5.62E-05
Modulo de ruptura - MR 45 - 28 dias	2.55	62.6	0.00014	0.000497	0.0312	5.47E-05
Modulo de ruptura - MR 45 - 3 dias	3.08	75.9	0.000173	0.000629	0.0397	6.35E-05
Modulo de ruptura - MR 45 - 7 dias	2.85	70.1	0.000159	0.000572	0.036	5.97E-05
Modulo de ruptura - MR 48 - 14 dias	2.75	67.7	0.000153	0.000547	0.0345	5.81E-05
Modulo de ruptura - MR 48 - 28 dias	2.66	65.3	0.000147	0.000524	0.033	5.65E-05
Modulo de ruptura - MR 48 - 3 dias	3.19	78.7	0.00018	0.000657	0.0415	6.54E-05
Modulo de ruptura - MR 48 - 7 dias	2.96	72.9	0.000166	0.000599	0.0378	6.15E-05
Relleno Fluido - f'c 15 - 14 dias	1.44	35.1	7.37E-05	0.000235	0.014	3.36E-05
Relleno Fluido - f'c 15 - 28 dias	1.33	32.2	6.65E-05	0.000206	0.0122	3.17E-05
Relleno Fluido - f'c 15 - 3 dias	1.86	45.9	0.000101	0.000343	0.021	4.07E-05
Relleno Fluido - f'c 15 - 7 dias	1.64	40.2	8.67E-05	0.000286	0.0173	3.70E-05
Relleno Fluido - f'c 20 - 14 dias	1.46	35.7	7.52E-05	0.00024	0.0144	3.40E-05
Relleno Fluido - f'c 20 - 28 dias	1.35	32.8	6.79E-05	0.000212	0.0125	3.21E-05
Relleno Fluido - f'c 20 - 3 dias	1.89	46.4	0.000103	0.000349	0.0214	4.11E-05
Relleno Fluido - f'c 20 - 7 dias	1.66	40.8	8.82E-05	0.000292	0.0177	3.74E-05
Relleno Fluido - f'c 25 - 14 dias	1.49	36.4	7.69E-05	0.000247	0.0148	3.44E-05



Relleno Fluido - f'c 25 - 28 dias	1.38	33.5	6.97E-05	0.000219	0.013	3.26E-05
Relleno Fluido - f'c 25 - 3 dias	1.91	47.1	0.000104	0.000356	0.0219	4.15E-05
Relleno Fluido - f'c 25 - 7 dias	1.69	41.5	8.99E-05	0.000299	0.0182	3.78E-05
Relleno Fluido - f'c 30 - 14 dias	1.52	37.1	7.87E-05	0.000254	0.0153	3.49E-05
Relleno Fluido - f'c 30 - 28 dias	1.41	34.2	7.14E-05	0.000226	0.0134	3.30E-05
Relleno Fluido - f'c 30 - 3 dias	1.94	47.8	0.000106	0.000362	0.0223	4.20E-05
Relleno Fluido - f'c 30 - 7 dias	1.72	42.2	9.16E-05	0.000305	0.0186	3.83E-05
Relleno Fluido - f'c 40 - 14 dias	1.59	38.8	8.30E-05	0.000271	0.0164	3.60E-05
Relleno Fluido - f'c 40 - 28 dias	1.47	36	7.58E-05	0.000243	0.0145	3.41E-05
Relleno Fluido - f'c 40 - 3 dias	2.01	49.6	0.00011	0.000379	0.0234	4.31E-05
Relleno Fluido - f'c 40 - 7 dias	1.78	43.9	9.60E-05	0.000323	0.0197	3.94E-05
Relleno Fluido - f'c 50 - 14 dias	1.66	40.7	8.79E-05	0.000291	0.0177	3.73E-05
Relleno Fluido - f'c 50 - 28 dias	1.55	37.9	8.06E-05	0.000262	0.0158	3.54E-05
Relleno Fluido - f'c 50 - 3 dias	2.08	51.5	0.000115	0.000399	0.0247	4.44E-05
Relleno Fluido - f'c 50 - 7 dias	1.86	45.8	0.000101	0.000342	0.021	4.07E-05
Relleno Fluido - f'c 60 - 14 dias	1.75	43	9.36E-05	0.000313	0.0191	3.88E-05
Relleno Fluido - f'c 60 - 28 dias	1.64	40.1	8.64E-05	0.000285	0.0173	3.69E-05
Relleno Fluido - f'c 60 - 3 dias	2.17	53.7	0.000121	0.000421	0.0261	4.59E-05
Relleno Fluido - f'c 60 - 7 dias	1.95	48.1	0.000107	0.000365	0.0224	4.21E-05
Relleno Fluido - f'c 70 - 14 dias	1.86	45.8	0.000101	0.000342	0.021	4.06E-05
Relleno Fluido - f'c 70 - 28 dias	1.76	43.2	9.59E-05	0.000313	0.0187	3.87E-05
Relleno Fluido - f'c 70 - 3 dias	2.28	56.5	0.000128	0.00045	0.028	4.77E-05
Relleno Fluido - f'c 70 - 7 dias	2.06	50.9	0.000114	0.000393	0.0243	4.40E-05

OTHER ENVIRONMENTAL INFO

- Certificado SIG Calidad
- Certificado SIG Medio Ambiente



- Certificado SIG Seguridad y Salud en el Trabajo
- ONNCE
- EMA
- Industria Limpia
- Empresa Segura

REFERENCES

ASTM Standards:

- ASTM A36/A36M Standard Specification for Carbon Structural Steel
- ASTM A108 Standard Specification for Steel Bar, Carbon and Alloy, Cold-Finished
- ASTM A123/A123M Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
- ASTM A153/A153M Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
- ASTM A184 Standard Specification for Welded Deformed Steel Bar Mats for Concrete Reinforcement
- ASTM A307 Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength
- ASTM A416/A416M Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete
- ASTM A555/A555M Standard Specification for General Requirements for Stainless Steel Wire and Wire Rods
- ASTM A615/A615M Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
- ASTM A666 Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar
- ASTM A706/A706M Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement
- ASTM A767/A767M Standard Specification for Zinc-Coated (Galvanized) Steel Bars for Concrete Reinforcement
- ASTM A775/A775M Standard Specification for Epoxy-Coated Steel Reinforcing Bars
- ASTM A820/A820M Standard Specification for Steel Fibers for Fiber-Reinforced Concrete
- ASTM A884/A884M Standard Specification for Epoxy-Coated Steel Wire and Welded Wire Reinforcement
- ASTM A934/A934M Standard Specification for Epoxy-Coated Prefabricated Steel Reinforcing Bars
- ASTM A1064/A1064M Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
- ASTM C33/C33M Standard Specification for Concrete Aggregates
- ASTM C94 Standard Specification for Ready-Mixed Concrete
- ASTM C150/C150M Standard Specification for Portland Cement
- ASTM C260/C260M Standard Specification for Air-Entraining Admixtures for Concrete
- ASTM C595 Standard Specification for Blended Hydraulic Cements



- ASTM C618 Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
- ASTM C979/C979M Standard Specification for Pigments for Integrally Colored Concrete
- ASTM C989/C989M Standard Specification for Slag Cement for Use in Concrete and Mortars
- ASTM C1017/C1017M Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete
- ASTM C1116/C1116M Standard Specification for Fiber-Reinforced Concrete
- ASTM C1157/C1157M Standard Performance Specification for Hydraulic Cement
- ASTM C1240 Standard Specification for Silica Fume Used in Cementitious Mixtures
- ASTM C1602/C1602M Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete
- ASTM G109 Standard Test Method for Determining Effects of Chemical Admixtures on Corrosion of Embedded Steel Reinforcement in Concrete Exposed to Chloride Environments
- ASTM C330/C330M Standard Specification for Lightweight Aggregates for Structural Concrete
- ASTM C494/C494M Standard Specification for Chemical Admixtures for Concrete

ISO Standards:

- ISO 6707-1: 2014 Buildings and Civil Engineering Works - Vocabulary - Part 1: General Terms
- ISO 14021:1999 Environmental Labels and Declarations - Self-declared Environmental Claims (Type II Environmental Labeling)
- ISO 14025:2006 Environmental Labels and Declarations - Type III Environmental Declarations - Principles and Procedures
- ISO 14040:2006 Environmental Management - Life Cycle Assessment - Principles and Framework
- ISO 14044:2006 Environmental Management - Life Cycle Assessment - Requirements and Guidelines
- ISO 14067:2018 Greenhouse Gases - Carbon Footprint of Products - Requirements and Guidelines for Quantification
- ISO 14050:2009 Environmental Management - Vocabulary
- ISO 21930:2017 Sustainability in Building Construction - Environmental Declaration of Building Products

