


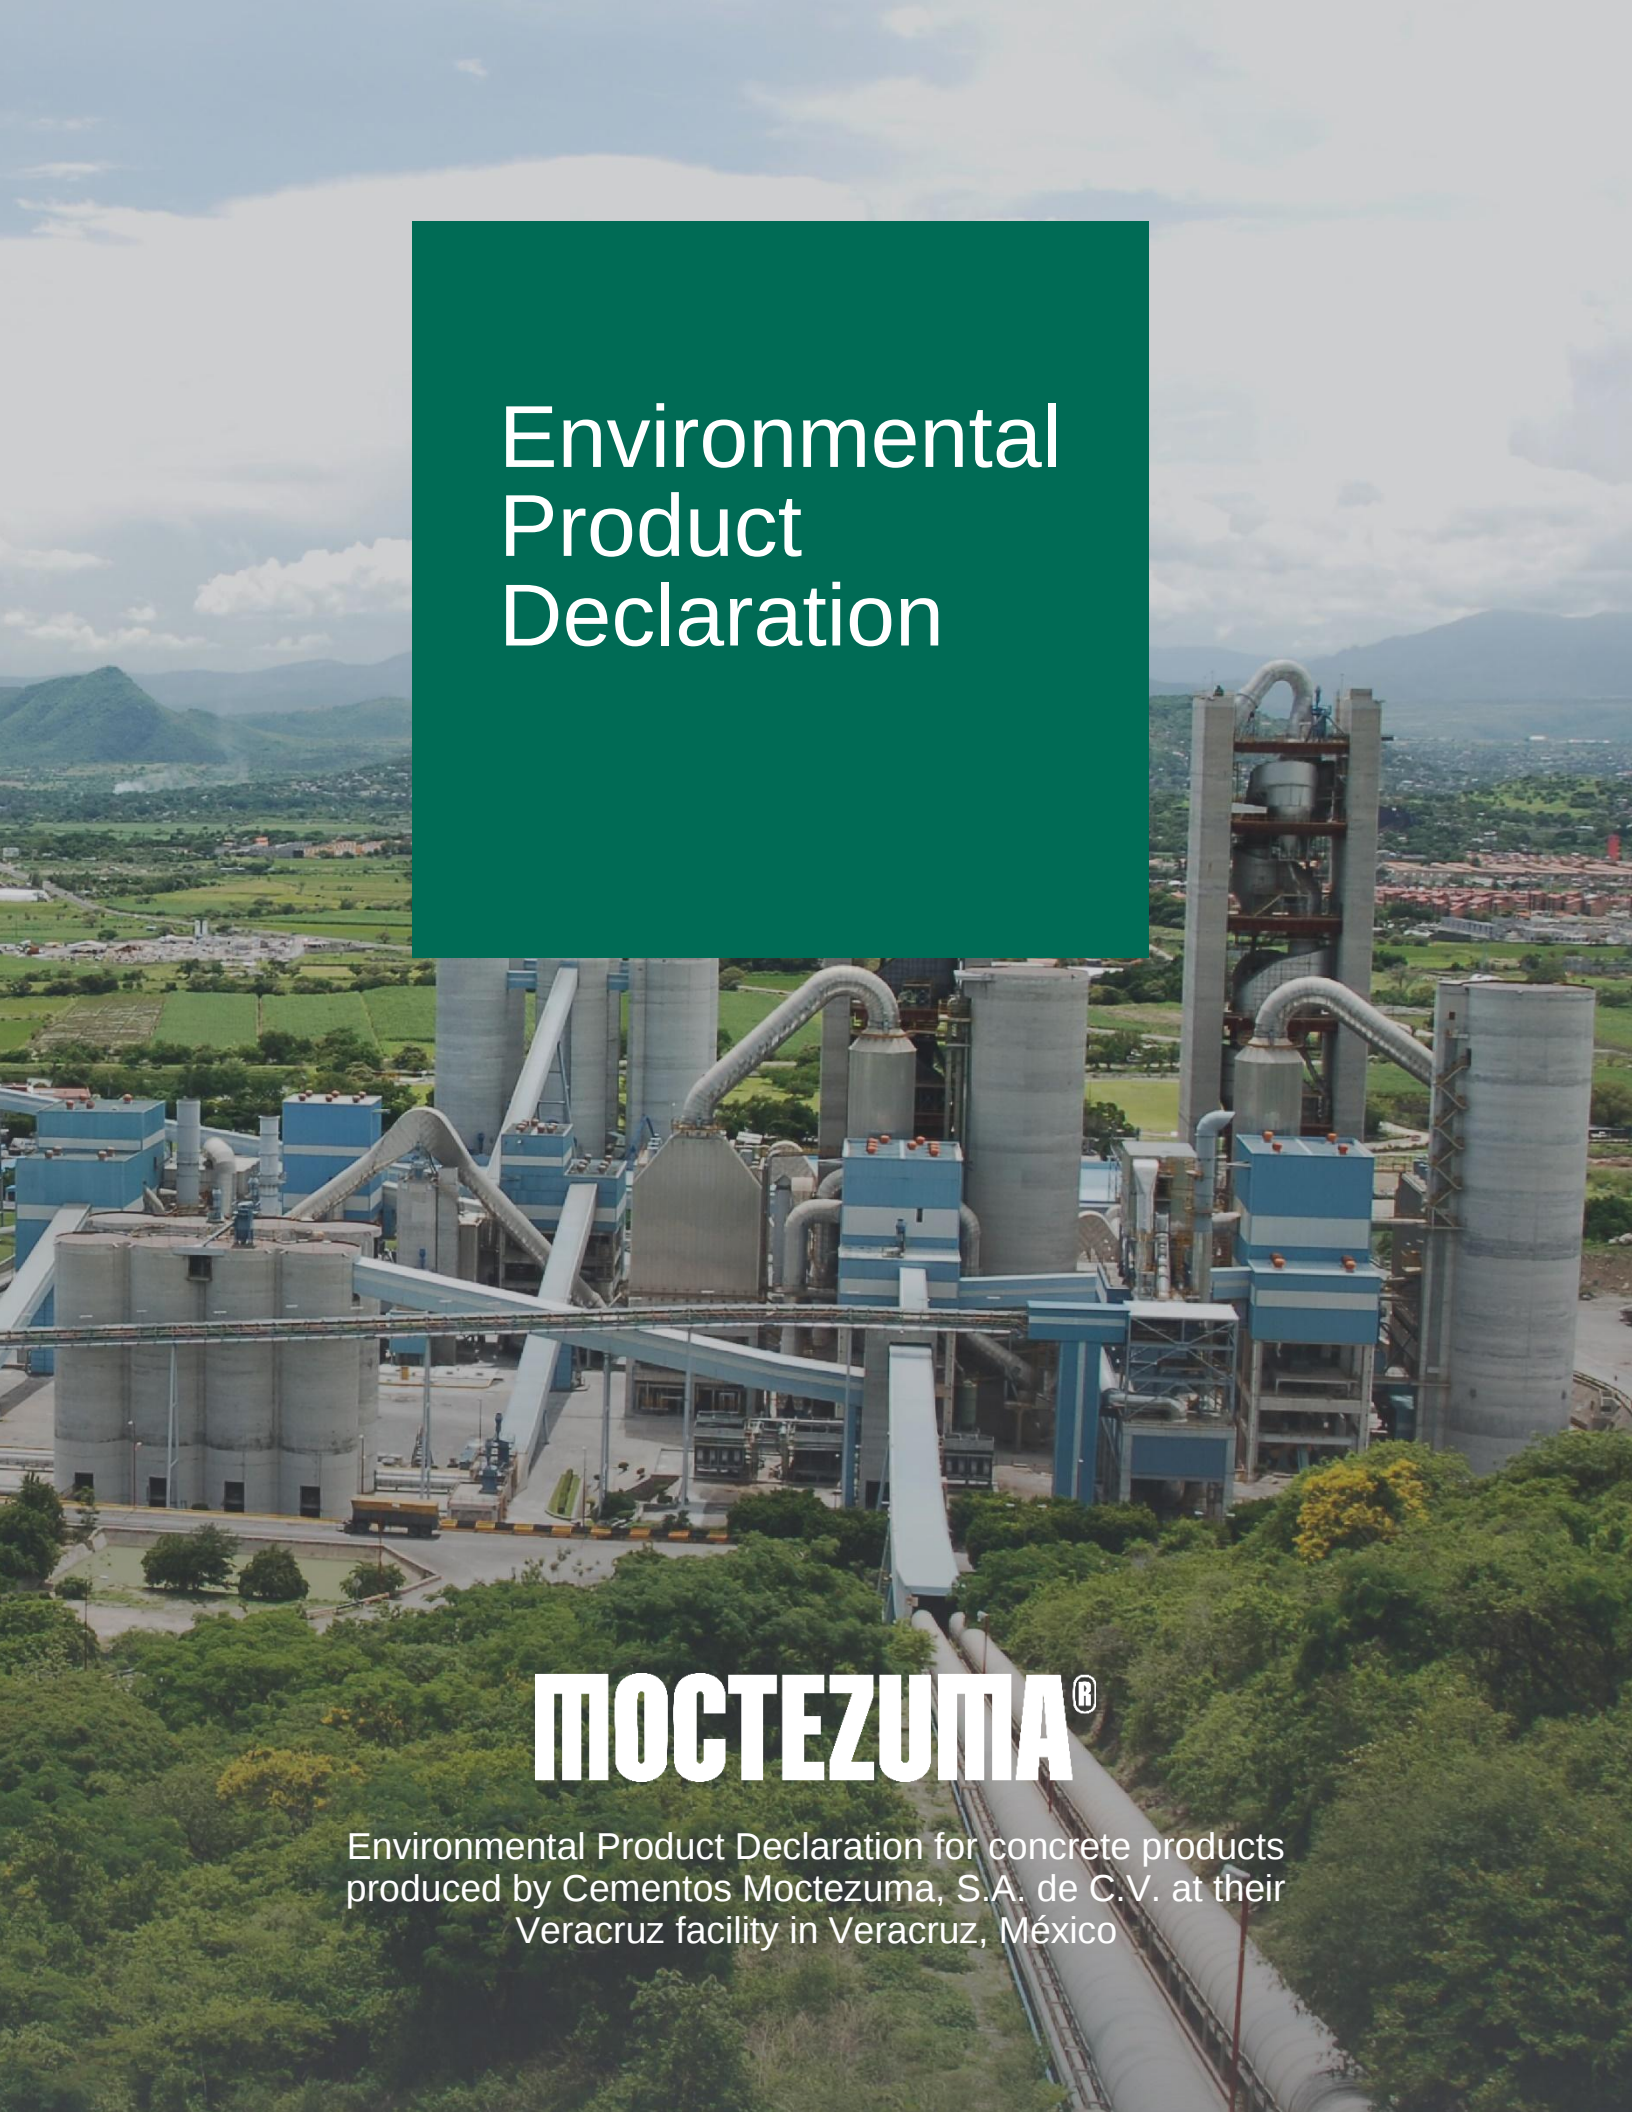

Environmental Product Declaration

MOCTEZUMA®

Environmental Product Declaration for concrete products
produced by Cementos Moctezuma, S.A. de C.V. at their
Veracruz facility in Veracruz, México

ADMINISTRATIVE INFORMATION

International Certified Environmental Product Declaration

Declared Product:	This Environmental Product Declaration (EPD) covers ready mix concrete products produced by Cementos Moctezuma S.A. de C.V. Declared unit: 1 m3 of concrete	
Declaration Owner:	Cementos Moctezuma S.A. de C.V.	
	134 PH Monte Elbruz, Col. Lomas de Chapultepec	
	Ciudad de México, México	
	www.cmoctezuma.com.mx	
	Jair Juan Manuel Martinez Miguel, martinez,jair@cmoctezuma.com.mx	
Program Operator:	Labeling Sustainability	
	700 S. Rosemary	
	West Palm Beach, FL	
	www.labelingsustainability.com	
Product Category Rule:	ISO 21930:2017 Sustainability in Building Construction – Environmental Declaration of Building Products: serves as the core PCR Product Category Rule of Environmental Product Declarations PCR for Concrete serves as the sub-category PCR.	
	PCR Program Operator: NSF International	
	Sub-category PCR review was conducted by: Thomas P. Gloria, Ph. D. of Industrial Ecology Consultants: 35 Bracebridge, Rd., Newton, MA 02459-1728, t.gloria@industrial-ecology.com. Dr. Michael Overcash of Environmental Clarity: 2908 Chipmunk Lane, Raleigh, NC 27607-3117, mrovercash@earthlink.net. Mr. Bill Stough of Sustainable Research Group: PO Box 1684, Grand Rapids, MI 49501-1684, bstough@sustainableresearchgroup.com.	
Independent LCA Reviewer and EPD Verifier:	This EPD was independently verified in accordance with ISO 14025 and ISO 21930. The life cycle assessment was independently reviewed in accordance ISO 14044 and the referenced PCR.	
	Independent verification of the declaration, according to ISO 14025:2006	
	External	
	Third Party Verifier	
	Denice V. Staaf, Certified 3rd Party Verifier under Labeling Sustainability (www.labelingsustainability.com)	
Date of Issue:	23 April 2025	
Period of Validity:	5 years; valid until 23 April 2030	
EPD Number:	CECOMO04232507	

TABLE OF CONTENTS

Administrative Information	1
Company Description	3
Study Goal	3
Description Of Product And Scope	4
Ready Mix Concrete Design Summary	4
Ready Mix Concrete Design Composition	14
System Boundaries	15
Cut-Off Criteria	16
Data Sources And Data Quality Assessment	16
Raw Material Transport	16
Electricity	17
Fuel Required For Machinery	17
Waste Generation	17
Recovered Energy	17
Recycled/Reused Material/Components	17
Module A1 Material Losses	17
Direct A3 Emissions Accounting	17
Waste Transport Requirements	17
Product Transport Requirements	17
Data Quality Assessment	18
Environmental Indicators And Inventory Metrics	19
Limitations	21
Total Impact Summary	21
Other Environmental Info	38
References	38
ASTM Standards	38
ISO Standards	40

COMPANY DESCRIPTION

Cementos Moctezuma is a prominent Mexican company established in 1943, specializing in the production, distribution, and marketing of cement, concrete, and aggregates under the well-known brands Cementos Moctezuma and Concretos Moctezuma. Listed on the Mexican Stock Exchange since 1988, the company maintains a strong financial position characterized by discipline and zero debt.

With three cement plants boasting an annual capacity of eight million tons and 30 concrete plants producing over 590 types of concrete, Cementos Moctezuma has an extensive distribution network of more than 530 centers, covering 95% of Mexico. The company also offers value-added services, including specialized technical advice, mobile laboratories, construction supervision, and training.

Cementos Moctezuma is committed to sustainable development, aligning its operations with the United Nations' Sustainable Development Goals through a strategy focused on five pillars: Safety and health, Energy and climate change, Corporate social responsibility, Environment and biodiversity, and Circular economy. The company emphasizes technological innovation and operational efficiency to produce high-quality products while minimizing environmental impact, including reducing CO₂ emissions and optimizing water use.

A qualified team of 1,303 passionate collaborators drives Cementos Moctezuma's mission to promote the construction of a better country for families and future generations while being committed to environmental stewardship. The company also champions equity and inclusion in the construction industry through initiatives like Casco Rosa, which recognizes the contributions of women in the sector. Additionally, Cementos Moctezuma actively engages in social responsibility programs to enhance the quality of life in the communities it serves, reinforcing its status as a consolidated company with deep Mexican roots.

STUDY GOAL

The intended application of this life cycle assessment (LCA) is to comply with the procedures for creating a Type III environmental product declaration (EPD) and publish the EPD for public review on the website, <http://labelingsustainability.com/>. This level of study is in accordance with EPD Product Category Rule (PCR) for Ready Mix Concrete published by NSF International (2019) and is a sub-PCR of International Standards Organization (ISO) 21930:2017 Sustainability in buildings and civil works - Core rules for EPDs of construction products and services; International Standards Organization (ISO) 14025:2006 Environmental labels and declarations, Type III environmental declarations-Principles and procedures; ISO 14044:2006 Environmental management, Life cycle assessment- Requirements and guidelines; and ISO 14040:2006 Environmental management, Life cycle assessment-Principles and framework. The performance of this study and its subsequent publishing is in alignment with the business-to-business (B2B) communication requirements for the environmental assessment of building products. The study does not intend to support comparative assertions and is intended to be disclosed to the public.

This project report was commissioned to differentiate Cementos Moctezuma from their competition for the following reasons: generate an advantage for the organization; offer customers information to help them make informed product decisions; improve the environmental performance of Cementos Moctezuma by continuously measuring, controlling and reducing the environmental impacts of their products; help project facilitators working on Leadership in Energy and Environmental Design (LEED)

projects achieve their credit goal; and to strengthen Cementos Moctezuma's license to operate in the community. The intended audience for this LCA report is Cementos Moctezuma's employees, their suppliers, project specifiers of their products, architects, and engineers. The EPD report is also available for policy makers, government officials interested in sustainability, academic professors, and LCA professionals. This LCA report does not include product comparisons from other facilities.

DESCRIPTION OF PRODUCT AND SCOPE

This EPD reports on 142 concrete mixes manufactured at Cementos Moctezuma concrete facility in Veracruz, Mexico.

This LCA assumes the impacts from products manufactured in accordance with the standards outlined in this report. This LCA is a cradle-to-gate study, and therefore, stages extending beyond the plant gate are not included in this LCA. Excluded stages include transportation of the manufactured material to the construction site; on-site construction processes and components; building (infrastructure) use and maintenance; and "end-of-life" effects.

READY MIX CONCRETE DESIGN SUMMARY

The following tables provide a list of the ready-mix concrete products considered in this EPD along with key performance parameters.

Mix Designs: 0 to 15 MPa

Table 1: Declared products with Mix designs: 0 to 15MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H ₂ O to cement ratio
1	Convencional - f'c 100 - 7 dias	9.80 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
2	Convencional - f'c 100 - 3 dias	9.80 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
3	Convencional - f'c 100 - 28 dias	9.80 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
4	Convencional - f'c 100 - 14 dias	9.80 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	9.80	Proprietary
5	Convencional - f'c 150 - 7 dias	14.70 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary
6	Convencional - f'c 150 - 3 dias	14.70 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary
7	Convencional - f'c 150 - 28 dias	14.70 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary

8	Convencional - f'c 150 - 14 días	14.70 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	14.70	Proprietary
57	Relleno Fluido - f'c 30 - 7 días	2.94 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
58	Relleno Fluido - f'c 30 - 3 días	2.94 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
59	Relleno Fluido - f'c 30 - 28 días	2.94 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
60	Relleno Fluido - f'c 30 - 14 días	2.94 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	2.94	Proprietary
61	Relleno Fluido - f'c 15 - 7 días	1.47 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
62	Relleno Fluido - f'c 15 - 3 días	1.47 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
63	Relleno Fluido - f'c 15 - 28 días	1.47 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
64	Relleno Fluido - f'c 15 - 14 días	1.47 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	1.47	Proprietary
65	Relleno Fluido - f'c 20 - 7 días	1.96 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
66	Relleno Fluido - f'c 20 - 3 días	1.96 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
67	Relleno Fluido - f'c 20 - 28 días	1.96 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
68	Relleno Fluido - f'c 20 - 14 días	1.96 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	1.96	Proprietary
69	Relleno Fluido - f'c 25 - 7 días	2.45 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary
70	Relleno Fluido - f'c 25 - 3 días	2.45 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary
71	Relleno Fluido - f'c 25 - 28 días	2.45 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary
72	Relleno Fluido - f'c 25 - 14 días	2.45 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	2.45	Proprietary

73	Relleno Fluido - f'c 40 - 7 dias	3.92 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
74	Relleno Fluido - f'c 40 - 3 dias	3.92 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
75	Relleno Fluido - f'c 40 - 28 dias	3.92 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
76	Relleno Fluido - f'c 40 - 14 dias	3.92 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	3.92	Proprietary
77	Relleno Fluido - f'c 50 - 7 dias	4.90 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
78	Relleno Fluido - f'c 50 - 3 dias	4.90 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
79	Relleno Fluido - f'c 50 - 28 dias	4.90 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
80	Relleno Fluido - f'c 50 - 14 dias	4.90 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	4.90	Proprietary
81	Relleno Fluido - f'c 60 - 7 dias	5.88 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
82	Relleno Fluido - f'c 60 - 3 dias	5.88 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
83	Relleno Fluido - f'c 60 - 28 dias	5.88 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
84	Relleno Fluido - f'c 60 - 14 dias	5.88 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	5.88	Proprietary
85	Relleno Fluido - f'c 70 - 7 dias	6.86 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary
86	Relleno Fluido - f'c 70 - 3 dias	6.86 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary
87	Relleno Fluido - f'c 70 - 28 dias	6.86 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary
88	Relleno Fluido - f'c 70 - 14 dias	6.86 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	6.86	Proprietary

Mix Designs: 15 to 20 MPa

Table 2 Declared products with Mix designs: 15 to 20MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H ₂ O to cement ratio
9	Convencional - f'c 200 - 7 dias	19.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
10	Convencional - f'c 200 - 3 dias	19.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
11	Convencional - f'c 200 - 28 dias	19.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
12	Convencional - f'c 200 - 14 dias	19.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
127	Lanzado - f'c 200 - 7 dias	19.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
128	Lanzado - f'c 200 - 3 dias	19.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
129	Lanzado - f'c 200 - 28 dias	19.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary
130	Lanzado - f'c 200 - 14 dias	19.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	19.6	Proprietary

Mix Designs: 21 to 25 MPa

Table 3: Declared products with Mix designs: 21 to 25MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H ₂ O to cement ratio
13	Convencional - f'c 250 - 7 dias	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary

14	Convencional - f'c 250 - 3 días	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
15	Convencional - f'c 250 - 28 días	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
16	Convencional - f'c 250 - 14 días	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
25	Estructural - f'c 250 - 7 días	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
26	Estructural - f'c 250 - 3 días	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
27	Estructural - f'c 250 - 28 días	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
28	Estructural - f'c 250 - 14 días	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
89	Modulo de ruptura - MR 35 - 7 días	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
90	Modulo de ruptura - MR 35 - 3 días	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
91	Modulo de ruptura - MR 35 - 28 días	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
92	Modulo de ruptura - MR 35 - 14 días	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
131	Lanzado - f'c 250 - 7 días	24.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
132	Lanzado - f'c 250 - 3 días	24.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
133	Lanzado - f'c 250 - 28 días	24.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary
134	Lanzado - f'c 250 - 14 días	24.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	24.5	Proprietary

Mix Designs: 26 to 30 MPa

Table 4: Declared products with Mix designs: 26 to 30MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H ₂ O to cement ratio
17	Convencional - f'c 300 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
18	Convencional - f'c 300 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
19	Convencional - f'c 300 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
20	Convencional - f'c 300 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
29	Estructural - f'c 300 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
30	Estructural - f'c 300 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
31	Estructural - f'c 300 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
32	Estructural - f'c 300 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
93	Modulo de ruptura - MR 38 - 7 dias	26.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
94	Modulo de ruptura - MR 38 - 3 dias	26.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
95	Modulo de ruptura - MR 38 - 28 dias	26.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
96	Modulo de ruptura - MR 38 - 14 dias	26.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
97	Modulo de ruptura - MR 40 - 7 dias	28.00 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
98	Modulo de ruptura - MR 40 - 3 dias	28.00 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
99	Modulo de ruptura - MR 40 - 28 dias	28.00 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary

100	Modulo de ruptura - MR 40 - 14 dias	28.00 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
101	Modulo de ruptura - MR 42 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
102	Modulo de ruptura - MR 42 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
103	Modulo de ruptura - MR 42 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
104	Modulo de ruptura - MR 42 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
113	Modulo de ruptura - MR 36 - 7 dias	25.20 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
114	Modulo de ruptura - MR 36 - 3 dias	25.20 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
115	Modulo de ruptura - MR 36 - 28 dias	25.20 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
116	Modulo de ruptura - MR 36 - 14 dias	25.20 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	25.2	Proprietary
117	Baja contracción - MR 38 - 28 dias	26.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
118	Baja contracción - MR 38 - 14 dias	26.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	26.6	Proprietary
119	Baja contracción - MR 40 - 28 dias	28.00 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
120	Baja contracción - MR 40 - 14 dias	28.00 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	28.0	Proprietary
121	Baja contracción - MR 42 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
122	Baja contracción - MR 42 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
135	Lanzado - f'c 300 - 7 dias	29.40 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
136	Lanzado - f'c 300 - 3 dias	29.40 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary

137	Lanzado - f'c 300 - 28 dias	29.40 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary
138	Lanzado - f'c 300 - 14 dias	29.40 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	29.4	Proprietary

Mix Designs: 31 to 35 MPa

Table 5: Declared products with Mix designs: 31 to 35MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
21	Convencional - f'c 350 - 7 dias	34.30 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
22	Convencional - f'c 350 - 3 dias	34.30 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
23	Convencional - f'c 350 - 28 dias	34.30 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
24	Convencional - f'c 350 - 14 dias	34.30 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
33	Estructural - f'c 350 - 7 dias	34.30 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
34	Estructural - f'c 350 - 3 dias	34.30 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
35	Estructural - f'c 350 - 28 dias	34.30 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
36	Estructural - f'c 350 - 14 dias	34.30 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
105	Modulo de ruptura - MR 45 - 7 dias	31.50 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
106	Modulo de ruptura - MR 45 - 3 dias	31.50 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
107	Modulo de ruptura - MR 45 - 28 dias	31.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
108	Modulo de ruptura - MR 45 - 14 dias	31.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary

109	Modulo de ruptura - MR 48 - 7 dias	33.60 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
110	Modulo de ruptura - MR 48 - 3 dias	33.60 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
111	Modulo de ruptura - MR 48 - 28 dias	33.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
112	Modulo de ruptura - MR 48 - 14 dias	33.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
123	Baja contracción - MR 45 - 28 dias	31.50 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
124	Baja contracción - MR 45 - 14 dias	31.50 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	31.5	Proprietary
125	Baja contracción - MR 48 - 28 dias	33.60 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
126	Baja contracción - MR 48 - 14 dias	33.60 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	33.6	Proprietary
139	Lanzado - f'c 350 - 7 dias	34.30 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
140	Lanzado - f'c 350 - 3 dias	34.30 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
141	Lanzado - f'c 350 - 28 dias	34.30 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary
142	Lanzado - f'c 350 - 14 dias	34.30 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	34.3	Proprietary

Mix Designs: 36 to 40 MPa

Table 6: Declared products with Mix designs: 36 to 40MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H ₂ O to cement ratio
37	Alta resistencia - f'c 400 - 7 dias	39.20 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary
38	Alta resistencia - f'c 400 - 3 dias	39.20 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary
39	Alta resistencia - f'c 400 - 28 dias	39.20 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary

40	Alta resistencia - f'c 400 - 14 dias	39.20 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	39.2	Proprietary
----	---	---	-----------------------	------	-------------

Mix Designs: 41 to 45 MPa

Table 7: Declared products with Mix designs: 41 to 45MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
41	Alta resistencia - f'c 450 - 7 dias	44.10 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary
42	Alta resistencia - f'c 450 - 3 dias	44.10 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary
43	Alta resistencia - f'c 450 - 28 dias	44.10 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary
44	Alta resistencia - f'c 450 - 14 dias	44.10 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	44.1	Proprietary

Mix Designs: 46 to 50 MPa

Table 7: Declared products with Mix designs: 46 to 50MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
45	Alta resistencia - f'c 500 - 7 dias	49.00 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary
46	Alta resistencia - f'c 500 - 3 dias	49.00 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary
47	Alta resistencia - f'c 500 - 28 dias	49.00 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary
48	Alta resistencia - f'c 500 - 14 dias	49.00 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	49	Proprietary

Mix Designs: 51 to 55 MPa

Table 7: Declared products with Mix designs: 51 to 55MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
49	Alta resistencia - f'c 550 - 7 dias	53.90 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary
50	Alta resistencia - f'c 550 - 3 dias	53.90 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary
51	Alta resistencia - f'c 550 - 28 dias	53.90 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary
52	Alta resistencia - f'c 550 - 14 dias	53.90 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	53.9	Proprietary

Mix Designs: 56 to 60 MPa

Table 7: Declared products with Mix designs: 56 to 60MPa considered in this environmental product declaration

Mix#	Unique name/ID	Short description	Product type	Resistance strength, MPa	H2O to cement ratio
53	Alta resistencia - f'c 600 - 7 dias	58.80 MPa 7d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary
54	Alta resistencia - f'c 600 - 3 dias	58.80 MPa 3d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary
55	Alta resistencia - f'c 600 - 28 dias	58.80 MPa 28d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary
56	Alta resistencia - f'c 600 - 14 dias	58.80 MPa 14d strength Ready Mix Concrete	Ready Mix Concrete	58.8	Proprietary

READY MIX CONCRETE DESIGN COMPOSITION

The following figures provide mass breakdown (kg per functional unit) of the material composition of each ready mix concrete design considered. Please note that the presented breakdown has been randomly altered by +/-10%, and is therefore only an approximation; this manipulation is to ensure confidentiality.

Table 8: Ready mix concrete composition.

Product Components	Product Components
Cement	Proprietary
Aggregates	30–60.00
Others	0.01–5.00
Total	100.00

SYSTEM BOUNDARIES

The following figure depicts the cradle-to-gate system boundary considered in this study.

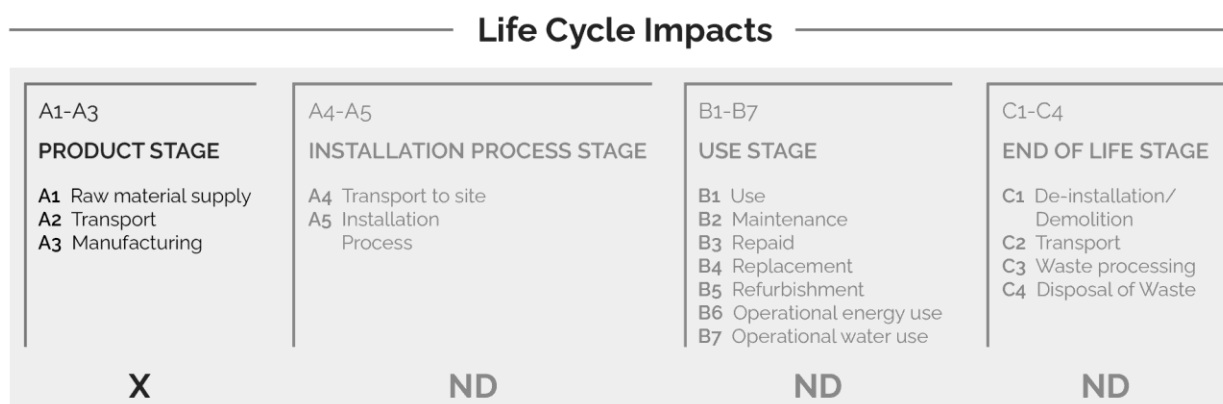


Figure 1: General life cycle phases for consideration in a construction works system

This is a Cradle-to-gate life cycle assessment and the following life cycle stages are included in the study:

- A1: Raw material supply (upstream processes) - Extraction, handling, and processing of the materials used in manufacturing the declared products in this LCA.
- A2: Transportation - Transportation of A1 materials from the supplier to the "gate" of the manufacturing facility (i.e., A3).
- A3: Manufacturing (core processes)- The energy and other utility inputs used to store, move, and manufacture the declared products and to operate the facility.

According to the PCR, the following figure illustrates the general activities and input requirements for producing ready mix concrete products and is not necessarily exhaustive.

System Boundary

Raw Material Supply (A1)	Transport (A2)	Manufacturing (A3)
Cements & SCMs Aggregates Admixtures Batch Water Fibers & Pigments	Truck, Rail, Ship Energy Carriers (fuels)	Energy Carriers (electricity and fuels) Ancillary Materials (lubricants, motor oil, cleaning chemicals, other consumables) Water (manufacturing water, including wash water for cement trucks, but excluding batch water) Waste (end of life treatment of ancillary materials and any packaging) 30% total fleet energy transit mix plants only

Figure 2: General system inputs considered in the product system and categorized by modules in scope

In addition, according to the relevant PCR, the following requirements are excluded from this study:

- Production, manufacture and construction of A3 building/capital goods and infrastructure.
- Production and manufacture of steel production equipment, steel delivery vehicles, earth-moving equipment, and laboratory equipment.
- Personnel-related activities (travel, furniture, office supplies);
- Energy use is related to company management and sales activities.

For this LCA the manufacturing plant, owned and operated by Cementos Moctezuma, is located at their Veracruz facility in Veracruz, México. All operating data is formulated using the actual data from Cementos Moctezuma's plant at the above location, including water, energy consumption and waste generation. All inputs for this system boundary are calculated for the plant.

This life cycle inventory was organized in a spreadsheet and was then input into an RStudio environment where pre-calculated LCIA results for relevant products/activities stemming from the ecoinvent v3.10 database and a local EPD database in combination with primary data from Cementos Moctezuma were utilized. Explanations of the contribution of each data source to this study are outlined in the section 'Data Sources and Quality'. Further LCI details for each declared product are provided in the sections 'Detailed LCI tables' and 'Transport tables' of the detailed LCA report. A parameter uncertainty analysis was also performed where key statistical results (e.g. min/mean/max etc.) are provided in the detailed LCA report.

CUT-OFF CRITERIA

ISO 14044:2006 and the focus PCR requires the LCA model to contain a minimum of 95% of the total inflows (mass and energy) to the upstream and core modules be included in this study. The cut-off criteria were applied to all other processes unless otherwise noted above as follows. A 1% cut-off is considered for all renewable and non-renewable primary energy consumption and the total mass of inputs within a unit process where the total of the neglected inputs does not exceed 5%.

DATA SOURCES AND DATA QUALITY ASSESSMENT

Raw material transport: A combination of actual mode/distance combinations were assumed for key bulk materials whereas ecoinvent default multi-modal market mix distances were assumed for other inputs where no original data could be provided.

Electricity: Electricity consumption values are for Moctezuma in calendar year 2023. These values were direct reported from Moctezuma records. The unit process "market for electricity, medium voltage/electricity, medium voltage/MX/kWh" was used to represent the Mexico grid electricity used by the cement plant.

Fuel required for machinery: Machinery-related fuel requirements were determined from direct Moctezuma information for the reference year 2023.

Waste generation: No High-level radioactive waste is generated on-site at this facility.

Recovered energy: There was no recovered energy on-site.

Recycled/reused material/components: The amount of returned concrete is based on Moctezuma primary data for the reference year, 2023.

Module A1 material losses: Due to lack of data, default loss factors were assumed.

Direct A3 emissions accounting: Direct emissions are modeled using fuel and technology appropriateecoinvent activities. See LCI input tables for details.

Waste transport requirements: Transportation distances are using estimated values. The waste hauler cannot guarantee the exact distances traveled due to the variation of route and actual location of disposal. Most waste disposal sites are near the plant therefore the 25 km distance is a representative estimate

Product transport requirements: Truck-related fuel requirements were determined from direct Moctezuma information for the reference year 2023.

The following tables depict a list of assumed life cycle inventory utilized in the LCA modeling to generate the impact results across the life cycle modules in scope. An assessment of the quality of each LCI activities utilized from various sources is also provided.

Table g: LCI inputs assumed for module A1 (i.e., raw material supply) *Data Quality Assessment Key Fair=1, Good=2, Very Good =3.*

Input	LCI.activity	Data.source	Geo	Year	Technology	Time	Geography	Reliability	Completeness
Andesite Sand	basalt quarry operation/basalt/RoW/kg; Note: modifications made (see ecoinvent activity changes table)	ecoinvent v3.10 in 2024	Edo. Mex	2024	2	3	1	3	3
Water	tap water production, conventional treatment/tap water/RoW/kg	ecoinvent v3.10 in 2024	Edo. Mex	2024	2	3	2	3	3

Limestone Gravel	limestone quarry operation/limestone, unprocessed/RoW/kg; Note: modifications made (see ecoinvent activity changes table)	ecoinvent v3.10 in 2024	Edo. Mex	2024	2	3	1	3	3
Additives	chemical production, organic/chemical, organic/GLO/kg	ecoinvent v3.10 in 2024	Queretaro	2024	2	3	1	3	3
Cement	Gris CPC 40RS/cement/MX/tonne	Program Operator: Labeling Sustainability - EPD ID: bb72e77d-c6d2-4caa-bage-18cce10c7824	Morelos	23 November 2024	3	3	3	3	3
River Sand	sand quarry operation, extraction from river bed/sand/BR/kg; Note: modifications made (see ecoinvent activity changes table)	ecoinvent v3.10 in 2024	Morelos	2024	2	3	2	3	3

DATA QUALITY ASSESSMENT

Data quality/variability requirements, as specified in the PCR, are applied. This section describes the data quality achieved relative to the ISO 14044:2006 requirements. Data quality is judged based on its precision (measured, calculated or estimated), completeness (e.g., unreported emissions), consistency (degree of uniformity of the methodology applied within a study serving as a data source) and representativeness (geographical, temporal, and technological).

Precision: Through measurement and calculation, the manufacturers collected and provided primary data on their annual production. For accuracy, the LCA practitioner and 3rd Party Verifier validated the plant gate-to-gate data.

Completeness: All relevant specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled to represent the specified and declared products. Most relevant background materials and processes were taken from ecoinvent v3.10 LCI datasets where relatively recent region-specific electricity inputs were utilized. The most relevant EPDs requiring key A1 input were also utilized where readily available.

Consistency: To ensure consistency, the same modeling structure across the respective product systems was utilized for all inputs, which consisted of raw material inputs and ancillary material, energy flows, water resource inputs, product and co-products outputs, returned and recovered Ready Mix Concrete materials, emissions to air, water and soil, and waste recycling and treatment. The same background LCI datasets from the ecoinvent v3.10 database were used across all product systems. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted. The

LCA team conducted mass and energy balances at the plant and selected process level to maintain a high level of consistency.

Reproducibility: Internal reproducibility is possible since the data and the models are stored and available in a machine-readable project file for all foreground and background processes, and in EPD Express proprietary Concrete and Cement EPD generator from LCA.no for all production facility and product-specific calculations. A considerable level of transparency is provided throughout the detailed LCA report as the specifications and material quantity make-up for the declared products are presented and key primary and secondary LCI data sources are summarized. The provision of more detailed publicly accessible data to allow full external reproducibility was not possible due to reasons of confidentiality.

EPD Express has developed a proprietary tool that allows the calculation of PCR-compliant LCA results for Ready Mix Concrete product designs. The tool auto-calculates results by scaling base-unit technosphere inputs (i.e. 1 kg sand, 1 kWh electricity, etc.) to replicate the reference flow conversions in openLCA.

Representativeness: The representativeness of the data is summarized as follows.

- Time related coverage of the manufacturing processes' primary collected data from 2023-01-01 to 2023-12-31.
- Upstream (background) LCI data was either the PCR specified default (if applicable) or more appropriate LCI datasets as found in the country-adjusted ecoinvent v3.10 database.
- Geographical coverage for inputs required by the A3 facility(ies) is representative of its region of focus; other upstream and background processes are based on US, North American, or global average data and adjusted to regional electricity mixes when relevant.
- Technological coverage is typical or average and specific to the participating facilities for all primary data.

ENVIRONMENTAL INDICATORS AND INVENTORY METRICS

Per the PCR, this EPD supports the life cycle impact assessment indicators and inventory metrics as listed in the tables below. As specified in the PCR, the most recent US EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI), impact categories were utilized as they provide a North American context for the mandatory category indicators to be included in the EPD. Additionally, the PCR requires a set of inventory metrics to be reported with the LCIA indicators.

Table 10: Life cycle impact categories and life cycle inventory metrics

ID	LCIA.indicators	Abbreviations	Units
1	Climate change: global warming potential (GWP100)	GWP100	kg CO ₂ -eq
2	Ozone depletion: ozone depletion potential (ODP)	ODP	kg CFC-11-eq
3	Acidification: acidification potential (AP)	AP	kg SO ₂ -eq
4	Eutrophication: eutrophication potential	EP	kg N-eq
5	Smog formation potential	SFP	kg O ₃ -eq
6	Energy resources: non-renewable: abiotic depletion potential (ADP): fossil fuels	ADP _{fossil}	MJ
Inventory metrics			

7	Inventory indicators ISO21930: Cumulative Energy Demand - renewable energy resources	RPRE	MJ
8	Inventory indicators ISO21930: Renewable primary resources with energy content used as material (i.e., PERM)	PRM	MJ
9	Inventory indicators ISO21930: Cumulative Energy Demand - non-renewable energy resources	NRPRE	MJ
10	Inventory indicators ISO21930: Non-renewable primary resources with energy content used as material (i.e., PENRM)	NRPRM	kg
11	Inventory indicators ISO21930: use of secondary material	SM	MJ
12	Inventory indicators ISO21930: use of renewable secondary fuels	RSF	MJ
13	Inventory indicators ISO21930: recovered energy	RE	MJ
14	Inventory indicators ISO21930: use of net fresh water	FW	m3
15	Inventory indicators ISO21930: hazardous waste disposed	HWD	kg
16	Inventory indicators ISO21930: non-hazardous waste disposed	NHWD	kg
17	Inventory indicators ISO21930: high-level radioactive waste disposed	HLRW	kg
18	Inventory indicators ISO21930: intermediate and low-level radioactive waste disposed	ILLRW	kg
19	Inventory indicators ISO21930: materials for recycling	MR	kg
20	Inventory indicators ISO21930: materials for energy recovery	MER	kg

It should be noted that emerging LCA impact categories and inventory items are still under development and can have high levels of uncertainty that preclude international acceptance pending further development. Use caution when interpreting data in any of the following categories.

- Renewable primary energy resources as energy (fuel);
- Renewable primary resources as material;
- Non-renewable primary resources as energy (fuel);
- Non-renewable primary resources as material;
- Secondary Materials;
- Renewable secondary fuels;
- Non-renewable secondary fuels;
- Recovered energy;
- Abiotic depletion potential for non-fossil mineral resources.
- Land use related impacts, for example on biodiversity and/or soil fertility;
- Toxicological aspects;
- Emissions from land use change [GWP 100 (land-use change)];
- Hazardous waste disposed;
- Non-hazardous waste disposed;
- High-level radioactive waste;
- Intermediate and low-level radioactive waste;
- Components for reuse;
- Materials for recycling;
- Materials for energy recovery;

- Recovered energy exported from the product system.

LIMITATIONS

This EPD is a declaration of potential environmental impact and does not support or provide definitive comparisons of the environmental performance of specific products. Only EPDs prepared from cradle-to-grave life cycle results and based on the same function and reference service life and quantified by the same functional unit can be used to assist purchasers and users in making informed comparisons between products.

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. Further, LCA offers a wide array of environmental impact indicators, and this EPD reports a collection of those, as specified by the PCR.

In addition to the impact results, this EPD provides several metrics related to resource consumption and waste generation. While this data may be informational in other ways, they do not provide a measure of impact on the environment.

TOTAL IMPACT SUMMARY

The following table reports the total LCA results for each product produced at the given ready mix concrete facility on a per 1m³ of concrete basis.

Table 11: **Total life cycle (across modules in scope) impact results for all mix designs, assuming the geometric mean point values on a per 1 m³ of concrete basis.**

a) Midpoint Impact Categories:

Indicator/LCI Metric	GWP100	ODP	AP	EP	SFP	ADP _{fossil}
Unit	kg CO ₂ -eq	kg CFC-11-eq	kg SO ₂ -eq	kg N-eq	kg O ₃ -eq	MJ
Alta resistencia - f'c 400 - 14 dias	398.92	1.16778E-06	0.211	0.0825	3.86	1096.64
Alta resistencia - f'c 400 - 28 dias	380.76	1.17101E-06	0.214	0.0824	3.98	1077.73
Alta resistencia - f'c 400 - 3 dias	452.00	1.25538E-06	0.225	0.0891	4.05	1176.72
Alta resistencia - f'c 400 - 7 dias	423.33	1.20691E-06	0.217	0.0855	3.94	1132.74
Alta resistencia - f'c 450 - 14 dias	436.63	1.23212E-06	0.221	0.0873	4.01	1154.56
Alta resistencia - f'c 450 - 28 dias	416.29	1.19969E-06	0.216	0.0849	3.94	1124.47
Alta resistencia - f'c 450 - 3 dias	489.61	1.3181E-06	0.235	0.0938	4.20	1233.69
Alta resistencia - f'c 450 - 7 dias	461.02	1.27079E-06	0.227	0.0903	4.09	1190.48

Alta resistencia - f'c 500 - 14 días	472.30	1.28721E-06	0.230	0.0915	4.12	1206.37
Alta resistencia - f'c 500 - 28 días	451.98	1.25506E-06	0.225	0.0891	4.05	1176.45
Alta resistencia - f'c 500 - 3 días	525.25	1.37272E-06	0.243	0.0979	4.30	1285.26
Alta resistencia - f'c 500 - 7 días	496.67	1.32553E-06	0.236	0.0944	4.20	1242.00
Alta resistencia - f'c 550 - 14 días	521.76	1.36363E-06	0.241	0.0973	4.27	1277.95
Alta resistencia - f'c 550 - 28 días	501.45	1.33173E-06	0.236	0.0949	4.20	1248.17
Alta resistencia - f'c 550 - 3 días	574.66	1.44824E-06	0.255	0.1037	4.45	1356.21
Alta resistencia - f'c 550 - 7 días	546.11	1.40164E-06	0.247	0.1002	4.34	1313.39
Alta resistencia - f'c 600 - 14 días	566.33	1.43222E-06	0.252	0.1025	4.40	1342.39
Alta resistencia - f'c 600 - 28 días	546.04	1.40053E-06	0.247	0.1001	4.34	1312.72
Alta resistencia - f'c 600 - 3 días	619.18	1.51605E-06	0.265	0.1088	4.57	1420.21
Alta resistencia - f'c 600 - 7 días	590.69	1.47031E-06	0.258	0.1054	4.47	1377.95
Baja contracción - MR 38 - 14 días	310.45	1.1599E-06	0.232	0.0813	4.63	1067.21
Baja contracción - MR 38 - 28 días	290.21	1.12904E-06	0.227	0.0790	4.58	1035.24
Baja contracción - MR 40 - 14 días	316.14	1.16904E-06	0.233	0.0820	4.65	1076.53
Baja contracción - MR 40 - 28 días	295.90	1.13819E-06	0.229	0.0796	4.60	1044.56
Baja contracción - MR 42 - 14 días	323.44	1.18026E-06	0.235	0.0828	4.67	1088.03
Baja contracción - MR 42 - 28 días	303.23	1.14986E-06	0.230	0.0805	4.62	1056.50
Baja contracción - MR 45 - 14 días	333.98	1.19665E-06	0.237	0.0840	4.70	1104.93
Baja contracción - MR 45 - 28 días	313.75	1.16586E-06	0.233	0.0817	4.65	1073.01
Baja contracción - MR 48 - 14 días	349.32	1.21933E-06	0.240	0.0858	4.73	1128.51
Baja contracción - MR 48 - 28 días	329.08	1.18854E-06	0.236	0.0834	4.68	1096.60
Convencional - f'c 100 - 14 días	205.16	8.91604E-07	0.179	0.0619	3.64	796.20
Convencional - f'c 100 - 28 días	184.69	8.5711E-07	0.173	0.0593	3.56	765.97
Convencional - f'c 100 - 3 días	262.05	9.81603E-07	0.192	0.0687	3.81	876.29
Convencional - f'c 150 - 14 días	224.78	9.24371E-07	0.184	0.0644	3.71	824.95

Convencional - f'c 150 - 28 días	204.36	8.90543E-07	0.179	0.0618	3.64	795.21
Convencional - f'c 150 - 3 días	281.65	1.01397E-06	0.197	0.0711	3.88	904.84
Convencional - f'c 150 - 7 días	245.15	9.57378E-07	0.189	0.0668	3.77	854.14
Convencional - f'c 200 - 14 días	248.64	9.54358E-07	0.188	0.0667	3.73	854.04
Convencional - f'c 200 - 28 días	220.07	9.0748E-07	0.180	0.0632	3.63	812.83
Convencional - f'c 200 - 3 días	305.53	1.04425E-06	0.201	0.0734	3.90	933.98
Convencional - f'c 200 - 7 días	268.99	9.87081E-07	0.193	0.0691	3.80	882.92
Convencional - f'c 250 - 14 días	273.21	9.96037E-07	0.194	0.0698	3.82	890.52
Convencional - f'c 250 - 28 días	252.77	9.61947E-07	0.189	0.0672	3.75	860.57
Convencional - f'c 250 - 3 días	330.06	1.08531E-06	0.208	0.0765	3.99	970.15
Convencional - f'c 250 - 7 días	293.52	1.028E-06	0.199	0.0722	3.88	899.57
Convencional - f'c 300 - 14 días	317.81	1.06512E-06	0.204	0.0750	3.95	951.92
Convencional - f'c 300 - 28 días	297.42	1.03169E-06	0.199	0.0725	3.88	922.39
Convencional - f'c 300 - 3 días	374.58	1.15304E-06	0.218	0.0816	4.11	1030.69
Convencional - f'c 300 - 7 días	338.11	1.09686E-06	0.209	0.0774	4.01	980.19
Convencional - f'c 350 - 14 días	354.29	1.12135E-06	0.213	0.0792	4.05	1002.40
Convencional - f'c 350 - 28 días	333.91	1.08824E-06	0.208	0.0768	3.98	973.06
Convencional - f'c 350 - 3 días	411.01	1.20855E-06	0.226	0.0858	4.21	1080.62
Convencional - f'c 350 - 7 días	374.56	1.15265E-06	0.217	0.0816	4.11	1030.29
Estructural - f'c 250 - 14 días	273.40	9.99109E-07	0.195	0.0700	3.84	893.27
Estructural - f'c 250 - 28 días	252.98	9.65304E-07	0.190	0.0675	3.77	863.56
Estructural - f'c 250 - 3 días	330.23	1.08803E-06	0.208	0.0767	4.01	972.60
Estructural - f'c 250 - 7 días	293.73	1.03148E-06	0.200	0.0724	3.90	921.93
Estructural - f'c 300 - 14 días	318.00	1.06819E-06	0.205	0.0752	3.97	954.67
Estructural - f'c 300 - 28 días	297.58	1.03441E-06	0.200	0.0727	3.90	924.84
Estructural - f'c 300 - 3 días	374.75	1.15583E-06	0.218	0.0818	4.12	1033.20

Estructural - f'c 300 - 7 dias	338.30	1.09993E-06	0.210	0.0776	4.02	982.94
Estructural - f'c 350 - 14 dias	354.46	1.12414E-06	0.213	0.0794	4.07	1004.91
Estructural - f'c 350 - 28 dias	334.10	1.09131E-06	0.208	0.0770	4.00	975.81
Estructural - f'c 350 - 3 dias	411.20	1.21162E-06	0.226	0.0860	4.22	1083.37
Estructural - f'c 350 - 7 dias	374.75	1.15573E-06	0.218	0.0818	4.12	1033.04
Lanzado - f'c 200 - 14 dias	358.31	1.12655E-06	0.218	0.0799	4.18	939.82
Lanzado - f'c 200 - 28 dias	333.89	1.08727E-06	0.212	0.0770	4.11	909.18
Lanzado - f'c 200 - 3 dias	399.04	1.19228E-06	0.228	0.0848	4.30	991.02
Lanzado - f'c 200 - 7 dias	382.73	1.16566E-06	0.224	0.0828	4.25	970.32
Lanzado - f'c 250 - 14 dias	382.75	1.16599E-06	0.224	0.0829	4.25	970.62
Lanzado - f'c 250 - 28 dias	358.36	1.12727E-06	0.218	0.0800	4.18	940.44
Lanzado - f'c 250 - 3 dias	423.44	1.23125E-06	0.233	0.0877	4.37	1021.54
Lanzado - f'c 250 - 7 dias	407.14	1.20465E-06	0.229	0.0858	4.32	1000.81
Lanzado - f'c 300 - 14 dias	415.20	1.21645E-06	0.231	0.0867	4.34	1010.12
Lanzado - f'c 300 - 28 dias	390.83	1.1781E-06	0.225	0.0838	4.27	980.19
Lanzado - f'c 300 - 3 dias	455.87	1.28138E-06	0.241	0.0915	4.46	1060.84
Lanzado - f'c 300 - 7 dias	439.58	1.25501E-06	0.237	0.0895	4.41	1040.30
Lanzado - f'c 350 - 14 dias	451.66	1.27257E-06	0.239	0.0909	4.44	1054.11
Lanzado - f'c 350 - 28 dias	427.31	1.23445E-06	0.234	0.0880	4.37	1024.38
Lanzado - f'c 350 - 3 dias	492.30	1.33676E-06	0.248	0.0957	4.55	1104.35
Lanzado - f'c 350 - 7 dias	476.02	1.31075E-06	0.245	0.0937	4.50	1084.03
Modulo de ruptura - MR 35 - 14 dias	322.57	1.15422E-06	0.228	0.0811	4.52	992.08
Modulo de ruptura - MR 35 - 28 dias	302.34	1.12354E-06	0.224	0.0788	4.47	965.61
Modulo de ruptura - MR 35 - 3 dias	383.03	1.24248E-06	0.241	0.0878	4.66	1068.42
Modulo de ruptura - MR 35 - 7 dias	346.80	1.1903E-06	0.234	0.0838	4.58	1023.27
Modulo de ruptura - MR 36 - 14 dias	325.83	1.15945E-06	0.229	0.0815	4.53	996.56

Modulo de ruptura - MR 36 - 28 dias	305.60	1.12873E-06	0.225	0.0792	4.48	969.99
Modulo de ruptura - MR 36 - 3 dias	386.28	1.24764E-06	0.242	0.0882	4.67	1072.84
Modulo de ruptura - MR 36 - 7 dias	350.08	1.1959E-06	0.234	0.0842	4.59	1028.06
Modulo de ruptura - MR 38 - 14 dias	332.30	1.16917E-06	0.231	0.0822	4.55	1004.89
Modulo de ruptura - MR 38 - 28 dias	312.04	1.1381E-06	0.226	0.0799	4.50	978.04
Modulo de ruptura - MR 38 - 3 dias	392.75	1.25746E-06	0.243	0.0889	4.68	1081.33
Modulo de ruptura - MR 38 - 7 dias	356.53	1.20524E-06	0.236	0.0849	4.61	1036.08
Modulo de ruptura - MR 40 - 14 dias	339.61	1.18064E-06	0.232	0.0831	4.57	1014.74
Modulo de ruptura - MR 40 - 28 dias	319.36	1.14964E-06	0.228	0.0807	4.52	987.94
Modulo de ruptura - MR 40 - 3 dias	400.02	1.26826E-06	0.245	0.0897	4.70	1090.62
Modulo de ruptura - MR 40 - 7 dias	363.84	1.21674E-06	0.237	0.0858	4.63	1045.95
Modulo de ruptura - MR 42 - 14 dias	350.08	1.19581E-06	0.234	0.0842	4.59	1027.85
Modulo de ruptura - MR 42 - 28 dias	329.83	1.16481E-06	0.230	0.0819	4.54	1001.05
Modulo de ruptura - MR 42 - 3 dias	410.49	1.28334E-06	0.247	0.0909	4.72	1103.65
Modulo de ruptura - MR 42 - 7 dias	374.28	1.23154E-06	0.239	0.0869	4.65	1058.74
Modulo de ruptura - MR 45 - 14 dias	365.39	1.21812E-06	0.238	0.0859	4.63	1047.11
Modulo de ruptura - MR 45 - 28 dias	345.17	1.18757E-06	0.233	0.0836	4.57	1020.76
Modulo de ruptura - MR 45 - 3 dias	425.81	1.30578E-06	0.250	0.0926	4.76	1123.10
Modulo de ruptura - MR 45 - 7 dias	389.60	1.25387E-06	0.243	0.0886	4.68	1078.04
Modulo de ruptura - MR 48 - 14 dias	381.47	1.24099E-06	0.241	0.0877	4.66	1066.95
Modulo de ruptura - MR 48 - 28 dias	361.26	1.21069E-06	0.236	0.0854	4.61	1040.73
Modulo de ruptura - MR 48 - 3 dias	441.90	1.3288E-06	0.253	0.0943	4.79	1142.99
Modulo de ruptura - MR 48 - 7 dias	405.67	1.27667E-06	0.246	0.0904	4.71	1097.82
Relleno Fluido - f'c 15 - 14 dias	170.75	6.41947E-07	0.124	0.0451	2.41	570.19
Relleno Fluido - f'c 15 - 28 dias	146.42	6.04244E-07	0.118	0.0422	2.34	540.14
Relleno Fluido - f'c 15 - 3 dias	227.45	7.28706E-07	0.136	0.0516	2.56	639.26

Relleno Fluido - f'c 15 - 7 dias	191.02	6.73257E-07	0.128	0.0474	2.46	595.15
Relleno Fluido - f'c 20 - 14 dias	174.00	6.47058E-07	0.124	0.0454	2.42	574.30
Relleno Fluido - f'c 20 - 28 dias	149.67	6.09253E-07	0.119	0.0426	2.35	544.10
Relleno Fluido - f'c 20 - 3 dias	230.72	7.34104E-07	0.137	0.0520	2.57	643.61
Relleno Fluido - f'c 20 - 7 dias	194.27	6.78367E-07	0.129	0.0478	2.47	599.27
Relleno Fluido - f'c 25 - 14 dias	178.03	6.52802E-07	0.125	0.0459	2.42	578.79
Relleno Fluido - f'c 25 - 28 dias	153.71	6.15385E-07	0.120	0.0431	2.36	548.98
Relleno Fluido - f'c 25 - 3 dias	234.74	7.39821E-07	0.138	0.0524	2.58	648.07
Relleno Fluido - f'c 25 - 7 dias	198.30	6.84215E-07	0.130	0.0482	2.48	603.90
Relleno Fluido - f'c 30 - 14 dias	182.07	6.58958E-07	0.126	0.0463	2.44	583.69
Relleno Fluido - f'c 30 - 28 dias	157.76	6.21541E-07	0.120	0.0435	2.37	553.88
Relleno Fluido - f'c 30 - 3 dias	238.79	7.46082E-07	0.139	0.0529	2.59	653.12
Relleno Fluido - f'c 30 - 7 dias	202.35	6.90372E-07	0.131	0.0487	2.49	608.80
Relleno Fluido - f'c 40 - 14 dias	192.61	6.75136E-07	0.128	0.0476	2.46	596.56
Relleno Fluido - f'c 40 - 28 dias	168.28	6.37433E-07	0.123	0.0447	2.40	566.51
Relleno Fluido - f'c 40 - 3 dias	249.32	7.62259E-07	0.141	0.0541	2.62	665.99
Relleno Fluido - f'c 40 - 7 dias	212.88	7.06548E-07	0.133	0.0499	2.52	621.68
Relleno Fluido - f'c 50 - 14 dias	203.92	6.92047E-07	0.131	0.0488	2.49	609.95
Relleno Fluido - f'c 50 - 28 dias	179.61	6.5463E-07	0.125	0.0460	2.43	580.14
Relleno Fluido - f'c 50 - 3 dias	260.64	7.79171E-07	0.144	0.0554	2.65	679.39
Relleno Fluido - f'c 50 - 7 dias	224.19	7.23435E-07	0.136	0.0512	2.55	635.04
Relleno Fluido - f'c 60 - 14 dias	219.27	7.15039E-07	0.134	0.0506	2.53	628.16
Relleno Fluido - f'c 60 - 28 dias	194.96	6.77623E-07	0.129	0.0478	2.46	598.35
Relleno Fluido - f'c 60 - 3 dias	275.99	8.02162E-07	0.147	0.0572	2.69	697.60
Relleno Fluido - f'c 60 - 7 dias	239.56	7.46739E-07	0.139	0.0530	2.59	653.51
Relleno Fluido - f'c 70 - 14 dias	238.70	7.44552E-07	0.139	0.0528	2.58	651.63

Relleno Fluido - f'c 70 - 28 dias	214.36	7.06746E-07	0.133	0.0500	2.51	621.43
Relleno Fluido - f'c 70 - 3 dias	295.39	8.31287E-07	0.151	0.0594	2.74	720.68
Relleno Fluido - f'c 70 - 7 dias	258.96	7.75837E-07	0.143	0.0552	2.64	676.57

b) Resource Inventory Metrics:

Indicator/LCI Metric	RPRE	PRM	NRPRE	NRPRM	SM	RSF	RE	FW
Unit	MJ	MJ	MJ	kg	MJ	MJ	MJ	m3
Alta resistencia - f'c 400 - 14 dias	61.59	0.00	1050.19	46.48	22.64	0.00434	0.00427	0.599
Alta resistencia - f'c 400 - 28 dias	58.99	0.00	1040.18	37.57	21.40	0.00448	0.00403	0.590
Alta resistencia - f'c 400 - 3 dias	68.74	0.00	1123.56	53.18	25.90	0.00444	0.00489	0.609
Alta resistencia - f'c 400 - 7 dias	64.88	0.00	1083.20	49.57	24.15	0.00438	0.00456	0.605
Alta resistencia - f'c 450 - 14 dias	66.67	0.00	1103.36	51.22	24.95	0.00441	0.00471	0.607
Alta resistencia - f'c 450 - 28 dias	63.93	0.00	1075.86	48.64	23.70	0.00437	0.00447	0.603
Alta resistencia - f'c 450 - 3 dias	73.81	0.00	1175.79	57.93	28.21	0.00451	0.00533	0.618
Alta resistencia - f'c 450 - 7 dias	69.96	0.00	1136.19	54.31	26.46	0.00445	0.00500	0.613
Alta resistencia - f'c 500 - 14 dias	71.48	0.00	1150.64	55.76	27.16	0.00447	0.00513	0.615
Alta resistencia - f'c 500 - 28 dias	68.74	0.00	1123.30	53.18	25.90	0.00443	0.00489	0.611
Alta resistencia - f'c 500 - 3 dias	78.61	0.00	1222.82	62.46	30.42	0.00457	0.00575	0.626
Alta resistencia - f'c 500 - 7 dias	74.76	0.00	1183.17	58.85	28.66	0.00451	0.00542	0.621
Alta resistencia - f'c 550 - 14 dias	78.13	0.00	1215.93	62.05	30.21	0.00455	0.00572	0.629
Alta resistencia - f'c 550 - 28 dias	75.40	0.00	1188.73	59.47	28.96	0.00451	0.00548	0.625
Alta resistencia - f'c 550 - 3 dias	85.26	0.00	1287.49	68.76	33.47	0.00464	0.00634	0.642
Alta resistencia - f'c 550 - 7 dias	81.41	0.00	1248.27	65.15	31.72	0.00459	0.00600	0.636
Alta resistencia - f'c 600 - 14 dias	84.14	0.00	1274.69	67.72	32.97	0.00462	0.00624	0.640
Alta resistencia - f'c 600 - 28 dias	81.40	0.00	1247.61	65.15	31.72	0.00458	0.00600	0.635
Alta resistencia - f'c 600 - 3 dias	91.25	0.00	1345.81	74.43	36.23	0.00471	0.00686	0.652

Alta resistencia - f'c 600 - 7 días	87.41	0.00	1307.16	70.82	34.47	0.00466	0.00653	0.645
Baja contracción - MR 38 - 14 días	50.19	0.00	1023.34	43.90	16.66	0.00455	0.00313	0.486
Baja contracción - MR 38 - 28 días	47.42	0.00	994.70	40.57	15.41	0.00451	0.00289	0.478
Baja contracción - MR 40 - 14 días	50.97	0.00	1031.73	44.83	17.01	0.00457	0.00319	0.488
Baja contracción - MR 40 - 28 días	48.20	0.00	1003.08	41.50	15.76	0.00453	0.00295	0.480
Baja contracción - MR 42 - 14 días	51.97	0.00	1042.03	46.03	17.47	0.00458	0.00328	0.492
Baja contracción - MR 42 - 28 días	49.21	0.00	1013.83	42.70	16.21	0.00454	0.00304	0.482
Baja contracción - MR 45 - 14 días	53.42	0.00	1057.20	47.76	18.12	0.00460	0.00340	0.494
Baja contracción - MR 45 - 28 días	50.65	0.00	1028.61	44.43	16.86	0.00456	0.00316	0.485
Baja contracción - MR 48 - 14 días	55.51	0.00	1078.25	50.29	19.07	0.00463	0.00358	0.500
Baja contracción - MR 48 - 28 días	52.74	0.00	1049.67	46.96	17.82	0.00459	0.00335	0.492
Convencional - f'c 100 - 14 días	35.02	0.00	778.72	17.50	10.56	0.00387	0.00197	0.506
Convencional - f'c 100 - 28 días	32.28	0.00	750.57	15.42	9.31	0.00382	0.00173	0.502
Convencional - f'c 100 - 3 días	42.62	0.00	852.99	23.32	14.07	0.00397	0.00264	0.519
Convencional - f'c 150 - 14 días	37.65	0.00	805.48	19.50	11.76	0.00391	0.00220	0.511
Convencional - f'c 150 - 28 días	34.91	0.00	777.82	17.42	10.51	0.00387	0.00196	0.507
Convencional - f'c 150 - 3 días	45.24	0.00	879.55	25.32	15.27	0.00401	0.00287	0.523
Convencional - f'c 150 - 7 días	40.37	0.00	832.59	21.58	13.02	0.00395	0.00244	0.516
Convencional - f'c 200 - 14 días	40.83	0.00	832.07	21.99	13.27	0.00393	0.00249	0.522
Convencional - f'c 200 - 28 días	37.01	0.00	793.77	19.08	11.51	0.00388	0.00215	0.516
Convencional - f'c 200 - 3 días	48.43	0.00	906.19	27.81	16.77	0.00403	0.00315	0.536
Convencional - f'c 200 - 7 días	43.55	0.00	858.87	24.07	14.52	0.00397	0.00272	0.527
Convencional - f'c 250 - 14 días	44.12	0.00	866.06	24.49	14.77	0.00398	0.00277	0.526
Convencional - f'c 250 - 28 días	41.38	0.00	838.19	22.41	13.52	0.00394	0.00253	0.523
Convencional - f'c 250 - 3 días	51.71	0.00	939.86	30.31	18.28	0.00408	0.00344	0.540
Convencional - f'c 250 - 7 días	46.51	0.00	879.32	20.27	16.02	0.00400	0.00301	0.522

Convencional - f'c 300 - 14 dias	50.07	0.00	922.88	29.06	17.53	0.00405	0.00330	0.544
Convencional - f'c 300 - 28 dias	47.34	0.00	895.43	26.98	16.27	0.00401	0.00306	0.540
Convencional - f'c 300 - 3 dias	57.65	0.00	995.83	34.88	21.03	0.00414	0.00397	0.558
Convencional - f'c 300 - 7 dias	52.78	0.00	949.07	31.14	18.78	0.00408	0.00354	0.551
Convencional - f'c 350 - 14 dias	54.94	0.00	969.62	32.80	19.78	0.00411	0.00373	0.553
Convencional - f'c 350 - 28 dias	52.22	0.00	942.36	30.72	18.53	0.00407	0.00349	0.549
Convencional - f'c 350 - 3 dias	62.51	0.00	1042.02	38.62	23.29	0.00420	0.00440	0.568
Convencional - f'c 350 - 7 dias	57.65	0.00	995.44	34.88	21.03	0.00414	0.00397	0.560
Estructural - f'c 250 - 14 dias	44.16	0.00	868.81	24.49	14.77	0.00400	0.00277	0.527
Estructural - f'c 250 - 28 dias	41.43	0.00	841.18	22.41	13.52	0.00396	0.00253	0.523
Estructural - f'c 250 - 3 dias	51.75	0.00	942.32	30.31	18.28	0.00410	0.00344	0.542
Estructural - f'c 250 - 7 dias	46.87	0.00	895.39	26.57	16.02	0.00404	0.00301	0.533
Estructural - f'c 300 - 14 dias	50.11	0.00	925.63	29.06	17.53	0.00407	0.00330	0.545
Estructural - f'c 300 - 28 dias	47.38	0.00	897.88	26.98	16.27	0.00403	0.00306	0.542
Estructural - f'c 300 - 3 dias	57.69	0.00	998.34	34.88	21.04	0.00416	0.00397	0.560
Estructural - f'c 300 - 7 dias	52.82	0.00	951.82	31.14	18.78	0.00410	0.00354	0.552
Estructural - f'c 350 - 14 dias	54.98	0.00	972.13	32.80	19.78	0.00413	0.00373	0.555
Estructural - f'c 350 - 28 dias	52.26	0.00	945.11	30.72	18.53	0.00409	0.00349	0.550
Estructural - f'c 350 - 3 dias	62.56	0.00	1044.77	38.62	23.29	0.00422	0.00440	0.569
Estructural - f'c 350 - 7 dias	57.69	0.00	998.19	34.88	21.04	0.00416	0.00397	0.560
Lanzado - f'c 200 - 14 dias	54.38	0.00	926.36	13.49	20.02	0.00401	0.00378	0.519
Lanzado - f'c 200 - 28 dias	51.19	0.00	896.71	12.49	18.52	0.00396	0.00349	0.517
Lanzado - f'c 200 - 3 dias	59.70	0.00	975.90	15.15	22.53	0.00408	0.00425	0.526
Lanzado - f'c 200 - 7 dias	57.57	0.00	955.87	14.48	21.53	0.00405	0.00406	0.523
Lanzado - f'c 250 - 14 dias	57.58	0.00	956.16	14.48	21.53	0.00405	0.00406	0.524
Lanzado - f'c 250 - 28 dias	54.39	0.00	926.97	13.49	20.02	0.00401	0.00378	0.521

Lanzado - f'c 250 - 3 días	62.90	0.00	1005.42	16.14	24.03	0.00412	0.00454	0.530
Lanzado - f'c 250 - 7 días	60.76	0.00	985.35	15.48	23.03	0.00409	0.00435	0.527
Lanzado - f'c 300 - 14 días	61.82	0.00	994.33	15.81	23.53	0.00410	0.00444	0.529
Lanzado - f'c 300 - 28 días	58.63	0.00	965.40	14.82	22.03	0.00406	0.00416	0.526
Lanzado - f'c 300 - 3 días	67.13	0.00	1043.39	17.47	26.04	0.00418	0.00492	0.534
Lanzado - f'c 300 - 7 días	65.00	0.00	1023.51	16.81	25.04	0.00415	0.00473	0.532
Lanzado - f'c 350 - 14 días	66.58	0.00	1036.83	17.31	25.79	0.00416	0.00488	0.534
Lanzado - f'c 350 - 28 días	63.40	0.00	1008.09	16.31	24.28	0.00412	0.00459	0.531
Lanzado - f'c 350 - 3 días	71.89	0.00	1085.41	18.97	28.29	0.00423	0.00535	0.539
Lanzado - f'c 350 - 7 días	69.76	0.00	1065.76	18.30	27.29	0.00420	0.00516	0.536
Modulo de ruptura - MR 35 - 14 días	50.52	0.00	970.00	22.10	17.50	0.00436	0.00329	0.472
Modulo de ruptura - MR 35 - 28 días	47.84	0.00	945.12	20.52	16.25	0.00433	0.00305	0.466
Modulo de ruptura - MR 35 - 3 días	58.52	0.00	1041.61	26.84	21.26	0.00444	0.00401	0.488
Modulo de ruptura - MR 35 - 7 días	53.73	0.00	999.30	24.00	19.00	0.00440	0.00358	0.477
Modulo de ruptura - MR 36 - 14 días	50.95	0.00	974.23	22.36	17.70	0.00437	0.00333	0.472
Modulo de ruptura - MR 36 - 28 días	48.27	0.00	949.24	20.78	16.45	0.00433	0.00309	0.468
Modulo de ruptura - MR 36 - 3 días	58.95	0.00	1045.77	27.10	21.46	0.00445	0.00404	0.489
Modulo de ruptura - MR 36 - 7 días	54.17	0.00	1003.84	24.25	19.20	0.00441	0.00361	0.478
Modulo de ruptura - MR 38 - 14 días	51.81	0.00	982.06	22.86	18.10	0.00438	0.00340	0.475
Modulo de ruptura - MR 38 - 28 días	49.12	0.00	956.78	21.28	16.85	0.00434	0.00316	0.471

Modulo de ruptura - MR 38 - 3 dias	59.81	0.00	1053.76	27.60	21.86	0.00446	0.00412	0.490
Modulo de ruptura - MR 38 - 7 dias	55.02	0.00	1011.35	24.76	19.60	0.00441	0.00369	0.480
Modulo de ruptura - MR 40 - 14 dias	52.78	0.00	991.34	23.43	18.55	0.00439	0.00349	0.474
Modulo de ruptura - MR 40 - 28 dias	50.09	0.00	966.11	21.85	17.30	0.00435	0.00325	0.470
Modulo de ruptura - MR 40 - 3 dias	60.77	0.00	1062.48	28.17	22.31	0.00447	0.00421	0.493
Modulo de ruptura - MR 40 - 7 dias	55.99	0.00	1020.65	25.33	20.06	0.00443	0.00378	0.481
Modulo de ruptura - MR 42 - 14 dias	54.16	0.00	1003.62	24.25	19.20	0.00440	0.00361	0.478
Modulo de ruptura - MR 42 - 28 dias	51.48	0.00	978.40	22.67	17.95	0.00437	0.00337	0.475
Modulo de ruptura - MR 42 - 3 dias	62.15	0.00	1074.69	28.99	22.96	0.00448	0.00433	0.496
Modulo de ruptura - MR 42 - 7 dias	57.37	0.00	1032.62	26.15	20.71	0.00444	0.00390	0.485
Modulo de ruptura - MR 45 - 14 dias	56.19	0.00	1021.69	25.45	20.16	0.00442	0.00379	0.482
Modulo de ruptura - MR 45 - 28 dias	53.51	0.00	996.91	23.87	18.90	0.00439	0.00356	0.476
Modulo de ruptura - MR 45 - 3 dias	64.18	0.00	1092.93	30.19	23.91	0.00451	0.00451	0.499
Modulo de ruptura - MR 45 - 7 dias	59.39	0.00	1050.72	27.35	21.66	0.00446	0.00408	0.489
Modulo de ruptura - MR 48 - 14 dias	58.31	0.00	1040.26	26.72	21.16	0.00444	0.00399	0.486
Modulo de ruptura - MR 48 - 28 dias	55.63	0.00	1015.62	25.14	19.90	0.00441	0.00375	0.481
Modulo de ruptura - MR 48 - 3 dias	66.30	0.00	1111.56	31.46	24.91	0.00452	0.00470	0.503

Modulo de ruptura - MR 48 - 7 dias	61.52	0.00	1069.23	28.61	22.66	0.00448	0.00427	0.494
Relleno Fluido - f'c 15 - 14 dias	29.25	0.00	562.42	7.78	9.18	0.00278	0.00172	0.505
Relleno Fluido - f'c 15 - 28 dias	26.06	0.00	533.61	6.55	7.68	0.00274	0.00143	0.502
Relleno Fluido - f'c 15 - 3 dias	36.67	0.00	628.61	10.67	12.69	0.00286	0.00239	0.516
Relleno Fluido - f'c 15 - 7 dias	31.91	0.00	586.35	8.81	10.43	0.00281	0.00196	0.509
Relleno Fluido - f'c 20 - 14 dias	29.68	0.00	566.37	7.95	9.38	0.00278	0.00176	0.507
Relleno Fluido - f'c 20 - 28 dias	26.49	0.00	537.41	6.71	7.88	0.00274	0.00147	0.505
Relleno Fluido - f'c 20 - 3 dias	37.10	0.00	632.80	10.83	12.89	0.00287	0.00243	0.516
Relleno Fluido - f'c 20 - 7 dias	32.33	0.00	590.30	8.98	10.63	0.00281	0.00200	0.511
Relleno Fluido - f'c 25 - 14 dias	30.20	0.00	570.65	8.16	9.63	0.00278	0.00181	0.510
Relleno Fluido - f'c 25 - 28 dias	27.02	0.00	542.07	6.92	8.13	0.00275	0.00152	0.506
Relleno Fluido - f'c 25 - 3 dias	37.63	0.00	637.04	11.04	13.14	0.00287	0.00248	0.519
Relleno Fluido - f'c 25 - 7 dias	32.86	0.00	594.73	9.19	10.89	0.00282	0.00205	0.513
Relleno Fluido - f'c 30 - 14 dias	30.73	0.00	575.34	8.36	9.88	0.00279	0.00185	0.513
Relleno Fluido - f'c 30 - 28 dias	27.55	0.00	546.77	7.13	8.38	0.00275	0.00157	0.509
Relleno Fluido - f'c 30 - 3 dias	38.16	0.00	641.89	11.25	13.39	0.00288	0.00252	0.520
Relleno Fluido - f'c 30 - 7 dias	33.39	0.00	599.43	9.39	11.14	0.00282	0.00209	0.516
Relleno Fluido - f'c 40 - 14 dias	32.11	0.00	587.68	8.90	10.53	0.00281	0.00198	0.515
Relleno Fluido - f'c 40 - 28 dias	28.93	0.00	558.87	7.66	9.03	0.00277	0.00169	0.512
Relleno Fluido - f'c 40 - 3 dias	39.54	0.00	654.23	11.78	14.04	0.00289	0.00265	0.523
Relleno Fluido - f'c 40 - 7 dias	34.77	0.00	611.76	9.93	11.79	0.00284	0.00222	0.518
Relleno Fluido - f'c 50 - 14 dias	33.59	0.00	600.49	9.47	11.24	0.00282	0.00211	0.519
Relleno Fluido - f'c 50 - 28 dias	30.41	0.00	571.92	8.24	9.73	0.00278	0.00183	0.514
Relleno Fluido - f'c 50 - 3 dias	41.02	0.00	667.04	12.36	14.74	0.00291	0.00278	0.526
Relleno Fluido - f'c 50 - 7 dias	36.25	0.00	624.55	10.50	12.49	0.00285	0.00235	0.520

Relleno Fluido - f'c 60 - 14 dias	35.60	0.00	617.92	10.26	12.19	0.00284	0.00229	0.521
Relleno Fluido - f'c 60 - 28 dias	32.41	0.00	589.34	9.02	10.68	0.00280	0.00201	0.517
Relleno Fluido - f'c 60 - 3 dias	43.02	0.00	684.47	13.14	15.69	0.00292	0.00296	0.529
Relleno Fluido - f'c 60 - 7 dias	38.26	0.00	642.24	11.29	13.44	0.00287	0.00253	0.523
Relleno Fluido - f'c 70 - 14 dias	38.14	0.00	640.40	11.25	13.39	0.00287	0.00252	0.524
Relleno Fluido - f'c 70 - 28 dias	34.95	0.00	611.44	10.01	11.89	0.00283	0.00224	0.521
Relleno Fluido - f'c 70 - 3 dias	45.56	0.00	706.56	14.13	16.90	0.00295	0.00319	0.533
Relleno Fluido - f'c 70 - 7 dias	40.79	0.00	664.31	12.28	14.64	0.00290	0.00276	0.527

c) Waste/output Inventory Metrics:

Indicator/LCI Metric	HWD	NHWD	HLRW	MR	MER
Unit	kg	kg	kg	kg	kg
Alta resistencia - f'c 400 - 14 dias	1.75	45.62	0.0000611	0.0257	5.09801E-05
Alta resistencia - f'c 400 - 28 dias	1.74	44.53	0.0000530	0.0248	5.18133E-05
Alta resistencia - f'c 400 - 3 dias	1.88	49.68	0.0000683	0.0286	5.31407E-05
Alta resistencia - f'c 400 - 7 dias	1.81	47.46	0.0000645	0.0271	5.18969E-05
Alta resistencia - f'c 450 - 14 dias	1.85	48.56	0.0000661	0.0278	5.26486E-05
Alta resistencia - f'c 450 - 28 dias	1.80	47.03	0.0000633	0.0267	5.18934E-05
Alta resistencia - f'c 450 - 3 dias	1.97	52.57	0.0000733	0.0307	5.47117E-05
Alta resistencia - f'c 450 - 7 dias	1.90	50.38	0.0000695	0.0291	5.35396E-05
Alta resistencia - f'c 500 - 14 dias	1.93	51.19	0.0000711	0.0297	5.38583E-05
Alta resistencia - f'c 500 - 28 dias	1.88	49.67	0.0000683	0.0286	5.31198E-05
Alta resistencia - f'c 500 - 3 dias	2.05	55.20	0.0000783	0.0326	5.58939E-05
Alta resistencia - f'c 500 - 7 dias	1.98	53.01	0.0000745	0.0310	5.47264E-05
Alta resistencia - f'c 550 - 14 dias	2.04	54.85	0.0000780	0.0324	5.55336E-05
Alta resistencia - f'c 550 - 28 dias	1.99	53.34	0.0000752	0.0313	5.48098E-05
Alta resistencia - f'c 550 - 3 dias	2.16	58.84	0.0000853	0.0353	5.75122E-05

Alta resistencia - f'c 550 - 7 días	2.09	56.66	0.0000814	0.0337	5.63824E-05
Alta resistencia - f'c 600 - 14 días	2.14	58.14	0.0000843	0.0348	5.70259E-05
Alta resistencia - f'c 600 - 28 días	2.09	56.63	0.0000814	0.0337	5.63148E-05
Alta resistencia - f'c 600 - 3 días	2.26	62.11	0.0000916	0.0377	5.89582E-05
Alta resistencia - f'c 600 - 7 días	2.19	59.96	0.0000876	0.0361	5.78808E-05
Baja contracción - MR 38 - 14 días	1.76	43.01	0.0000505	0.0214	5.7327E-05
Baja contracción - MR 38 - 28 días	1.72	41.45	0.0000470	0.0203	5.65599E-05
Baja contracción - MR 40 - 14 días	1.78	43.46	0.0000515	0.0217	5.75748E-05
Baja contracción - MR 40 - 28 días	1.73	41.90	0.0000480	0.0206	5.68077E-05
Baja contracción - MR 42 - 14 días	1.79	44.03	0.0000528	0.0221	5.78569E-05
Baja contracción - MR 42 - 28 días	1.75	42.48	0.0000492	0.0210	5.71209E-05
Baja contracción - MR 45 - 14 días	1.82	44.85	0.0000546	0.0227	5.82777E-05
Baja contracción - MR 45 - 28 días	1.77	43.29	0.0000511	0.0216	5.75151E-05
Baja contracción - MR 48 - 14 días	1.85	46.01	0.0000573	0.0236	5.8809E-05
Baja contracción - MR 48 - 28 días	1.81	44.45	0.0000538	0.0225	5.80464E-05
Convencional - f'c 100 - 14 días	1.34	31.30	0.0000273	0.0152	4.48792E-05
Convencional - f'c 100 - 28 días	1.29	29.76	0.0000249	0.0141	4.40461E-05
Convencional - f'c 100 - 3 días	1.46	35.43	0.0000340	0.0183	4.67965E-05
Convencional - f'c 150 - 14 días	1.38	32.77	0.0000296	0.0163	4.56572E-05
Convencional - f'c 150 - 28 días	1.33	31.25	0.0000272	0.0152	4.48663E-05
Convencional - f'c 150 - 3 días	1.51	36.89	0.0000364	0.0193	4.75499E-05
Convencional - f'c 150 - 7 días	1.43	34.27	0.0000320	0.0174	4.63961E-05
Convencional - f'c 200 - 14 días	1.42	34.32	0.0000327	0.0175	4.59492E-05
Convencional - f'c 200 - 28 días	1.36	32.20	0.0000294	0.0160	4.4875E-05
Convencional - f'c 200 - 3 días	1.55	38.45	0.0000395	0.0206	4.78583E-05
Convencional - f'c 200 - 7 días	1.47	35.81	0.0000351	0.0186	4.66685E-05

Convencional - f'c 250 - 14 dias	1.48	36.17	0.0000356	0.0189	4.69674E-05
Convencional - f'c 250 - 28 dias	1.43	34.65	0.0000332	0.0178	4.61601E-05
Convencional - f'c 250 - 3 dias	1.61	40.29	0.0000424	0.0219	4.88392E-05
Convencional - f'c 250 - 7 dias	1.51	37.07	0.0000327	0.0199	4.68651E-05
Convencional - f'c 300 - 14 dias	1.58	39.38	0.0000410	0.0213	4.83645E-05
Convencional - f'c 300 - 28 dias	1.53	37.87	0.0000386	0.0202	4.75982E-05
Convencional - f'c 300 - 3 dias	1.70	43.46	0.0000478	0.0243	5.01527E-05
Convencional - f'c 300 - 7 dias	1.62	40.85	0.0000434	0.0224	4.90236E-05
Convencional - f'c 350 - 14 dias	1.66	42.00	0.0000454	0.0232	4.94965E-05
Convencional - f'c 350 - 28 dias	1.61	40.49	0.0000430	0.0221	4.87495E-05
Convencional - f'c 350 - 3 dias	1.78	46.06	0.0000522	0.0263	5.1238E-05
Convencional - f'c 350 - 7 dias	1.70	43.45	0.0000478	0.0243	5.01262E-05
Estructural - f'c 250 - 14 dias	1.49	36.26	0.0000356	0.0189	4.71734E-05
Estructural - f'c 250 - 28 dias	1.44	34.74	0.0000332	0.0178	4.63845E-05
Estructural - f'c 250 - 3 dias	1.61	40.37	0.0000424	0.0220	4.90222E-05
Estructural - f'c 250 - 7 dias	1.53	37.75	0.0000380	0.0200	4.7871E-05
Estructural - f'c 300 - 14 dias	1.58	39.47	0.0000410	0.0213	4.85704E-05
Estructural - f'c 300 - 28 dias	1.54	37.95	0.0000386	0.0202	4.77812E-05
Estructural - f'c 300 - 3 dias	1.71	43.55	0.0000478	0.0243	5.03402E-05
Estructural - f'c 300 - 7 dias	1.63	40.94	0.0000434	0.0224	4.92295E-05
Estructural - f'c 350 - 14 dias	1.66	42.08	0.0000454	0.0233	4.9684E-05
Estructural - f'c 350 - 28 dias	1.62	40.58	0.0000430	0.0222	4.89554E-05
Estructural - f'c 350 - 3 dias	1.78	46.15	0.0000523	0.0263	5.1444E-05
Estructural - f'c 350 - 7 dias	1.71	43.54	0.0000478	0.0243	5.03321E-05
Lanzado - f'c 200 - 14 dias	1.61	40.40	0.0000286	0.0232	4.69E-05
Lanzado - f'c 200 - 28 dias	1.56	38.75	0.0000269	0.0219	4.62047E-05
Lanzado - f'c 200 - 3 dias	1.69	43.17	0.0000314	0.0253	4.80752E-05
Lanzado - f'c 200 - 7 dias	1.66	42.05	0.0000302	0.0245	4.75836E-05
Lanzado - f'c 250 - 14 dias	1.66	42.07	0.0000303	0.0245	4.76059E-05
Lanzado - f'c 250 - 28 dias	1.61	40.42	0.0000286	0.0232	4.69474E-05
Lanzado - f'c 250 - 3 dias	1.74	44.82	0.0000331	0.0266	4.87514E-05
Lanzado - f'c 250 - 7 dias	1.71	43.70	0.0000319	0.0257	4.82608E-05
Lanzado - f'c 300 - 14 dias	1.73	44.22	0.0000325	0.0262	4.84097E-05

Lanzado - f'c 300 - 28 días	1.68	42.59	0.0000309	0.0249	4.77752E-05
Lanzado - f'c 300 - 3 días	1.81	46.97	0.0000353	0.0283	4.95338E-05
Lanzado - f'c 300 - 7 días	1.78	45.86	0.0000342	0.0275	4.9059E-05
Lanzado - f'c 350 - 14 días	1.80	46.63	0.0000351	0.0281	4.9272E-05
Lanzado - f'c 350 - 28 días	1.75	45.01	0.0000334	0.0268	4.86532E-05
Lanzado - f'c 350 - 3 días	1.88	49.36	0.0000379	0.0303	5.03499E-05
Lanzado - f'c 350 - 7 días	1.85	48.26	0.0000368	0.0294	4.98972E-05
Modulo de ruptura - MR 35 - 14 días	1.69	41.11	0.0000329	0.0217	5.31296E-05
Modulo de ruptura - MR 35 - 28 días	1.65	39.71	0.0000308	0.0206	5.25893E-05
Modulo de ruptura - MR 35 - 3 días	1.81	45.19	0.0000392	0.0249	5.45019E-05
Modulo de ruptura - MR 35 - 7 días	1.74	42.76	0.0000354	0.0230	5.37296E-05
Modulo de ruptura - MR 36 - 14 días	1.69	41.34	0.0000332	0.0218	5.32365E-05
Modulo de ruptura - MR 36 - 28 días	1.65	39.94	0.0000312	0.0208	5.26925E-05
Modulo de ruptura - MR 36 - 3 días	1.81	45.42	0.0000395	0.0251	5.46043E-05
Modulo de ruptura - MR 36 - 7 días	1.74	43.00	0.0000357	0.0231	5.38614E-05
Modulo de ruptura - MR 38 - 14 días	1.71	41.78	0.0000339	0.0222	5.34026E-05
Modulo de ruptura - MR 38 - 28 días	1.67	40.38	0.0000318	0.0211	5.28356E-05
Modulo de ruptura - MR 38 - 3 días	1.83	45.86	0.0000402	0.0254	5.47785E-05
Modulo de ruptura - MR 38 - 7 días	1.76	43.44	0.0000364	0.0235	5.40025E-05
Modulo de ruptura - MR 40 - 14 días	1.72	42.29	0.0000346	0.0226	5.36247E-05
Modulo de ruptura - MR 40 - 28 días	1.68	40.89	0.0000326	0.0215	5.30623E-05
Modulo de ruptura - MR 40 - 3 días	1.84	46.36	0.0000409	0.0258	5.49568E-05
Modulo de ruptura - MR 40 - 7 días	1.77	43.95	0.0000371	0.0239	5.42266E-05
Modulo de ruptura - MR 42 - 14 días	1.74	43.00	0.0000357	0.0231	5.38542E-05
Modulo de ruptura - MR 42 - 28 días	1.70	41.59	0.0000337	0.0221	5.32918E-05
Modulo de ruptura - MR 42 - 3 días	1.86	47.06	0.0000420	0.0264	5.51798E-05
Modulo de ruptura - MR 42 - 7 días	1.79	44.64	0.0000382	0.0244	5.44312E-05
Modulo de ruptura - MR 45 - 14 días	1.77	44.03	0.0000373	0.0240	5.41978E-05
Modulo de ruptura - MR 45 - 28 días	1.73	42.64	0.0000352	0.0229	5.36664E-05

Modulo de ruptura - MR 45 - 3 dias	1.89	48.10	0.0000436	0.0272	5.55335E-05
Modulo de ruptura - MR 45 - 7 dias	1.82	45.68	0.0000398	0.0252	5.47768E-05
Modulo de ruptura - MR 48 - 14 dias	1.81	45.10	0.0000390	0.0248	5.45205E-05
Modulo de ruptura - MR 48 - 28 dias	1.76	43.72	0.0000369	0.0237	5.40039E-05
Modulo de ruptura - MR 48 - 3 dias	1.92	49.17	0.0000453	0.0280	5.58645E-05
Modulo de ruptura - MR 48 - 7 dias	1.85	46.75	0.0000415	0.0261	5.5095E-05
Relleno Fluido - f'c 15 - 14 dias	0.95	23.03	0.0000199	0.0125	2.91293E-05
Relleno Fluido - f'c 15 - 28 dias	0.90	21.39	0.0000181	0.0113	2.85144E-05
Relleno Fluido - f'c 15 - 3 dias	1.06	26.81	0.0000244	0.0156	3.04851E-05
Relleno Fluido - f'c 15 - 7 dias	0.99	24.39	0.0000215	0.0136	2.96352E-05
Relleno Fluido - f'c 20 - 14 dias	0.95	23.25	0.0000202	0.0127	2.9218E-05
Relleno Fluido - f'c 20 - 28 dias	0.90	21.61	0.0000183	0.0114	2.8595E-05
Relleno Fluido - f'c 20 - 3 dias	1.07	27.04	0.0000246	0.0157	3.05922E-05
Relleno Fluido - f'c 20 - 7 dias	0.99	24.61	0.0000218	0.0138	2.97239E-05
Relleno Fluido - f'c 25 - 14 dias	0.96	23.51	0.0000205	0.0129	2.92841E-05
Relleno Fluido - f'c 25 - 28 dias	0.91	21.88	0.0000186	0.0116	2.86876E-05
Relleno Fluido - f'c 25 - 3 dias	1.07	27.29	0.0000249	0.0159	3.06562E-05
Relleno Fluido - f'c 25 - 7 dias	1.00	24.87	0.0000221	0.0140	2.97981E-05
Relleno Fluido - f'c 30 - 14 dias	0.97	23.78	0.0000209	0.0131	2.93786E-05
Relleno Fluido - f'c 30 - 28 dias	0.92	22.15	0.0000190	0.0119	2.87822E-05
Relleno Fluido - f'c 30 - 3 dias	1.08	27.57	0.0000253	0.0162	3.0759E-05
Relleno Fluido - f'c 30 - 7 dias	1.01	25.14	0.0000225	0.0142	2.98927E-05
Relleno Fluido - f'c 40 - 14 dias	0.99	24.48	0.0000217	0.0137	2.96345E-05
Relleno Fluido - f'c 40 - 28 dias	0.94	22.85	0.0000198	0.0124	2.90197E-05
Relleno Fluido - f'c 40 - 3 dias	1.10	28.27	0.0000261	0.0167	3.10148E-05
Relleno Fluido - f'c 40 - 7 dias	1.03	25.84	0.0000233	0.0148	3.01486E-05

Relleno Fluido - f'c 50 - 14 días	1.01	25.22	0.0000226	0.0143	2.98759E-05
Relleno Fluido - f'c 50 - 28 días	0.96	23.60	0.0000207	0.0130	2.92794E-05
Relleno Fluido - f'c 50 - 3 días	1.12	29.01	0.0000270	0.0173	3.12562E-05
Relleno Fluido - f'c 50 - 7 días	1.05	26.59	0.0000242	0.0154	3.03879E-05
Relleno Fluido - f'c 60 - 14 días	1.04	26.23	0.0000238	0.0151	3.02059E-05
Relleno Fluido - f'c 60 - 28 días	0.99	24.61	0.0000219	0.0138	2.96094E-05
Relleno Fluido - f'c 60 - 3 días	1.15	30.02	0.0000282	0.0181	3.15862E-05
Relleno Fluido - f'c 60 - 7 días	1.08	27.60	0.0000253	0.0162	3.07383E-05
Relleno Fluido - f'c 70 - 14 días	1.08	27.52	0.0000253	0.0161	3.06549E-05
Relleno Fluido - f'c 70 - 28 días	1.03	25.89	0.0000234	0.0149	3.00319E-05
Relleno Fluido - f'c 70 - 3 días	1.19	31.30	0.0000297	0.0191	3.20087E-05
Relleno Fluido - f'c 70 - 7 días	1.12	28.88	0.0000269	0.0172	3.11588E-05

OTHER ENVIRONMENTAL INFO

- Certificado SIG Calidad
- Certificado SIG Medio Ambiente
- Certificado SIG Seguridad y Salud en el Trabajo
- ONNNCE
- EMA
- Industria Limpia
- Empresa Segura

REFERENCES

ASTM Standards:

- ASTM A36/A36M Standard Specification for Carbon Structural Steel
- ASTM A108 Standard Specification for Steel Bar, Carbon and Alloy, Cold-Finished
- ASTM A123/A123M Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
- ASTM A153/A153M Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
- ASTM A184 Standard Specification for Welded Deformed Steel Bar Mats for Concrete Reinforcement

- ASTM A307 Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength
- ASTM A416/A416M Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete
- ASTM A555/A555M Standard Specification for General Requirements for Stainless Steel Wire and Wire Rods
- ASTM A615/A615M Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
- ASTM A666 Standard Specification for Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar
- ASTM A706/A706M Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement
- ASTM A767/A767M Standard Specification for Zinc-Coated (Galvanized) Steel Bars for Concrete Reinforcement
- ASTM A775/A775M Standard Specification for Epoxy-Coated Steel Reinforcing Bars
- ASTM A820/A820M Standard Specification for Steel Fibers for Fiber-Reinforced Concrete
- ASTM A884/A884M Standard Specification for Epoxy-Coated Steel Wire and Welded Wire Reinforcement
- ASTM A934/A934M Standard Specification for Epoxy-Coated Prefabricated Steel Reinforcing Bars
- ASTM A1064/A1064M Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
- ASTM C33/C33M Standard Specification for Concrete Aggregates
- ASTM C94 Standard Specification for Ready-Mixed Concrete
- ASTM C150/C150M Standard Specification for Portland Cement
- ASTM C260/C260M Standard Specification for Air-Entraining Admixtures for Concrete
- ASTM C595 Standard Specification for Blended Hydraulic Cements
- ASTM C618 Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
- ASTM C979/C979M Standard Specification for Pigments for Integrally Colored Concrete
- ASTM C989/C989M Standard Specification for Slag Cement for Use in Concrete and Mortars
- ASTM C1017/C1017M Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete
- ASTM C1116/C1116M Standard Specification for Fiber-Reinforced Concrete
- ASTM C1157/C1157M Standard Performance Specification for Hydraulic Cement
- ASTM C1240 Standard Specification for Silica Fume Used in Cementitious Mixtures
- ASTM C1602/C1602M Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete
- ASTM G109 Standard Test Method for Determining Effects of Chemical Admixtures on Corrosion of Embedded Steel Reinforcement in Concrete Exposed to Chloride Environments
- ASTM C330/C330M Standard Specification for Lightweight Aggregates for Structural Concrete
- ASTM C494/C494M Standard Specification for Chemical Admixtures for Concrete

ISO Standards:

- ISO 6707-1: 2014 Buildings and Civil Engineering Works - Vocabulary - Part 1: General Terms
- ISO 14021:1999 Environmental Labels and Declarations - Self-declared Environmental Claims (Type II Environmental Labeling)
- ISO 14025:2006 Environmental Labels and Declarations - Type III Environmental Declarations - Principles and Procedures
- ISO 14040:2006 Environmental Management - Life Cycle Assessment - Principles and Framework
- ISO 14044:2006 Environmental Management - Life Cycle Assessment - Requirements and Guidelines
- ISO 14067:2018 Greenhouse Gases - Carbon Footprint of Products - Requirements and Guidelines for Quantification
- ISO 14050:2009 Environmental Management - Vocabulary
- ISO 21930:2017 Sustainability in Building Construction - Environmental Declaration of Building Products